


FEATURES:

- 4 Pole 12 Slot Hi-torque Motor Design
- CNC Machined 6061 T6 Billet Aluminum Heatsink Can
- High Purity Copper Windings Maximizes Efficiency
- High RPM ABEC5 Oversized Bearings
- Universal fit, fits all 1/10, 1/8 brushless cars-multi-mounting system for M3 screws
- Precision balanced rotor, smoothness for best reliability and maximum RPM
- Stator - Super Thin (0.2mm) Laminations
- Removable/Replaceable Rotor
- Precision Engineered for Maximum Energy Conversion



Product	KV (RPM/Volt)	Watts	Max voltage	Max Amps	Rotor Poles	IO	Resistance	Max RPM	Length	Diameters	Weight (g)	Shaft (mm)	Length of extend shaft	Connector
3650	5900	900	<8.4V	107A	4	5.2A	0.0043	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	5200	900	<9.6V	94A	4	3.7A	0.0051	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	4300	900	<12V	75A	4	2.7A	0.0075	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	3900	900	<13V	69A	4	2.0A	0.0081	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	3100	900	<16V	56A	4	1.4A	0.0126	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	2300	900	<22V	41A	4	1.2A	0.0182	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	2050	900	<24V	38A	4	1.0A	0.0212	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3650	1650	900	<30V	30A	4	0.7A	0.0318	50000	50mm	Ø36mm	180	Ø3.175	15mm	4.0mm gold
3660	4300	1200	<12V	100A	4	3.7A	0.0058	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	3800	1200	<13V	92A	4	2.8A	0.0083	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	3300	1200	<15V	80A	4	2.3A	0.0095	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	2600	1200	<19V	63A	4	1.5A	0.0146	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	2350	1200	<21V	57A	4	1.3A	0.0152	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	1950	1200	<26V	46A	4	1.2A	0.0231	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	1750	1200	<28V	43A	4	1.0A	0.0258	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3660	1400	1200	<36V	33A	4	0.7A	0.0378	50000	60mm	Ø36mm	219	Ø3.175/Ø5.0	17mm	4.0mm gold
3665	3100	1400	<16.8V	80A	4	3.8A	0.0061	50000	65mm	Ø36mm	245	Ø5.0	17mm	4.0mm gold
3665	2600	1400	<18.5V	75A	4	2.9A	0.0116	50000	65mm	Ø36mm	245	Ø5.0	17mm	4.0mm gold
3665	2100	1400	<23V	60A	4	1.9A	0.0162	50000	65mm	Ø36mm	245	Ø5.0	17mm	4.0mm gold
3665	1800	1400	<28V	52A	4	1.6A	0.0235	50000	65mm	Ø36mm	245	Ø5.0	17mm	4.0mm gold
3665	1550	1400	<32V	45A	4	1.2A	0.0266	50000	65mm	Ø36mm	245	Ø5.0	17mm	4.0mm gold
3670	2650	1600	<18.5V	86A	4	4.2A	0.0069	50000	70mm	Ø36mm	267	Ø5.0	17mm	4.0mm gold
3670	2150	1600	<23V	70A	4	3.0A	0.0121	50000	70mm	Ø36mm	267	Ø5.0	17mm	4.0mm gold
3670	1900	1600	<26V	60A	4	2.4A	0.0165	50000	70mm	Ø36mm	267	Ø5.0	17mm	4.0mm gold
3670	1350	1600	<37V	43A	4	1.5A	0.0281	50000	70mm	Ø36mm	267	Ø5.0	17mm	4.0mm gold
3670	1100	1600	<42V	38A	4	1.0A	0.0386	50000	70mm	Ø36mm	267	Ø5.0	17mm	4.0mm gold
3674	2250	1800	<22.2V	80A	4	4.0A	0.0076	50000	74mm	Ø36mm	297	Ø5.0	17mm	4.0mm gold
3674	1900	1800	<26V	70A	4	3.1A	0.0132	50000	74mm	Ø36mm	297	Ø5.0	17mm	4.0mm gold
3674	1580	1800	<32V	56A	4	2.6A	0.0161	50000	74mm	Ø36mm	297	Ø5.0	17mm	4.0mm gold
3674	1350	1800	<37V	50A	4	2.1A	0.0258	50000	74mm	Ø36mm	297	Ø5.0	17mm	4.0mm gold
3674	1150	1800	<42V	43A	4	1.6A	0.0298	50000	74mm	Ø36mm	297	Ø5.0	17mm	4.0mm gold

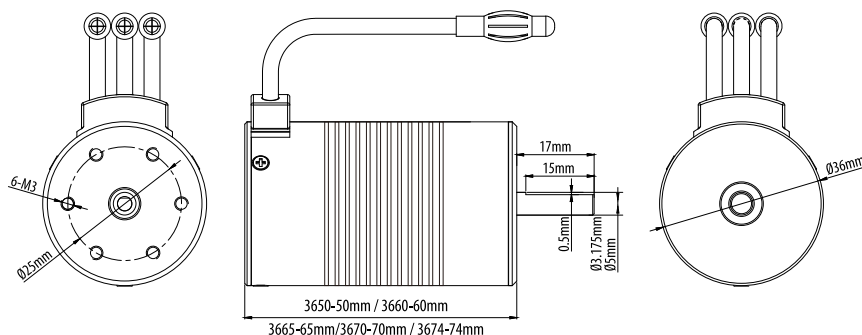