


User manual for control board K215-V1.3

Technical parameter:

Power Supply: DC10--30V

Standby current: 40mA

Fingerprint capacity: 200

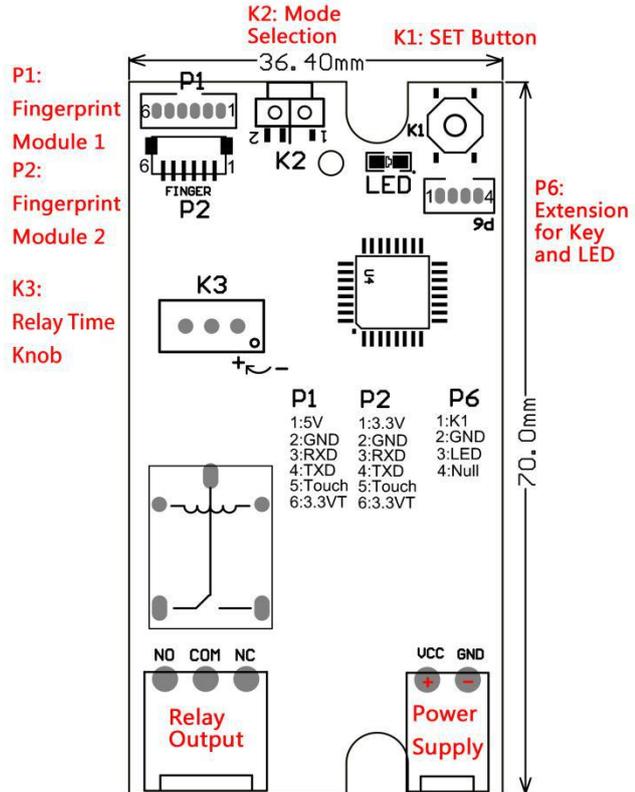

Instructions for control board:

1. Press SET button shortly, system in register state and blue indicator light flash fast, place your finger in the collection area, fingerprint register successful when hearing music; Fingerprint can be registered continuously when system in register state; if no need adding fingerprint more, waiting a few seconds.
2. When back to factory default, press SET button until hear "Di" and music, means initialization operation successful.
3. Mode Selection Usage: when chose ②, operating time of the relay is 1s-20s after pass fingerprint, can adjust by knob. When chose ①, relay operated when fingerprint passed, and then relay released when fingerprint passed again, relay operated and released circularly. Relay released when power off.

Note:

- In factory status, any fingerprint can pass, after register fingerprints, this function is invalid;