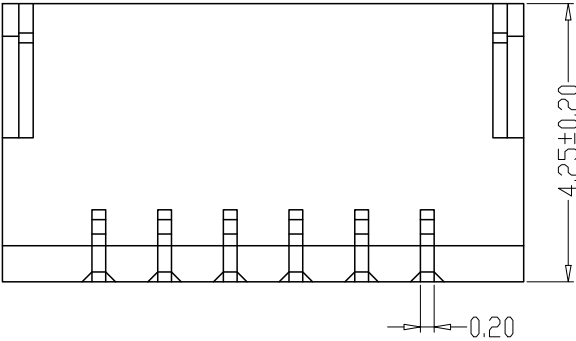


SPECIFICATIONS

1、Current Rating: 1A AC, DC

2、Voltage Rating: 125V AC, DC

3、Temperatuer Range: -25℃~+85℃

4、Contact Resistance: 20mΩ Max



5、Insulation Resistance: 100MΩ Min

6、Withstanding Voltang: 500V AC/minute

7、Material: Wafer PA6T, UL94V-0

PIN Phosphoric bronze Tin-plated

Solder tad Phosphoric bronze Tin-plated

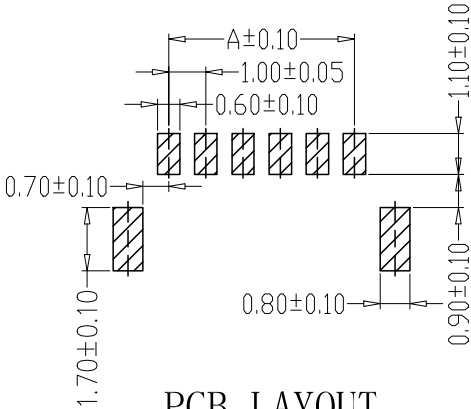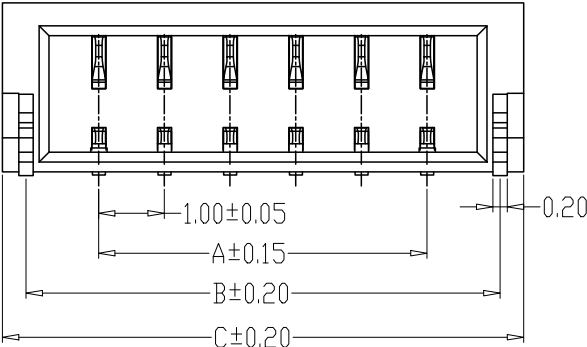

PCB LAYOUT

编 号	尺寸 (mm)		
	A	B	C
A1002WF-02A	1.00	3.20	4.00
A1002WF-03A	2.00	4.20	5.00
A1002WF-04A	3.00	5.20	6.00
A1002WF-05A	4.00	6.20	7.00
A1002WF-06A	5.00	7.20	8.00
A1002WF-07A	6.00	8.20	9.00
A1002WF-08A	7.00	9.20	10.00
A1002WF-09A	8.00	10.20	11.00
A1002WF-10A	9.00	11.20	12.00
A1002WF-11A	10.00	12.20	13.00
A1002WF-12A	11.00	13.20	14.00
A1002WF-20A	19.00	21.20	22.00

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO.,LTD

品名 (TITLE) 1.0超薄卧贴	制图 (DR) anlan
	校对 (CHKD) 田峰
	审核 (APPD) 黄志明

料号 (DWG.NO)	比例 (SCALE)	单位 (UNITS) mm	张数 (SHEET) 1 OF 1	SIZE A4	REV A
-------------	------------	------------------	----------------------	------------	----------



一般公差 (TOLERANCE)

X. ±0.50	.XX ±1.0
.X ±0.20	.XXX ±0.05
ANGLES	±1°