

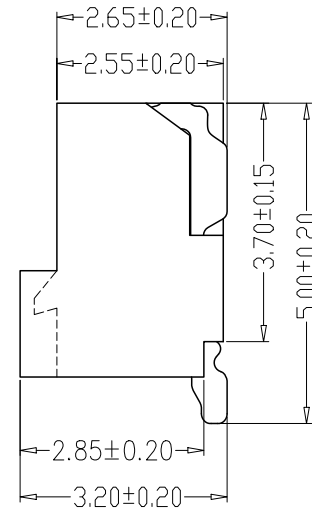
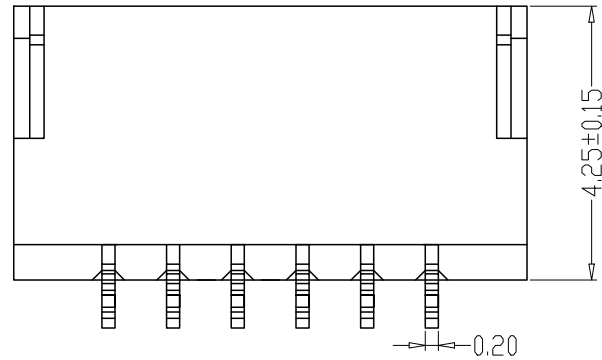


E		F	
版次	变更摘要		日期
0	新产品发行		2024/7/24

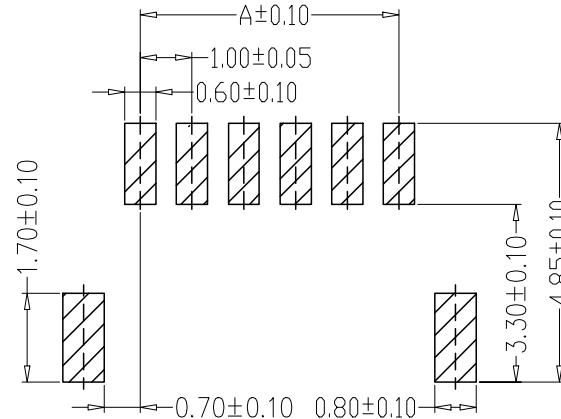

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperature Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100MΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Wafer PA6T, UL94V-0
PIN Phosphoric bronze Tin-plated
Solder Pad Phosphoric bronze Tin-plated

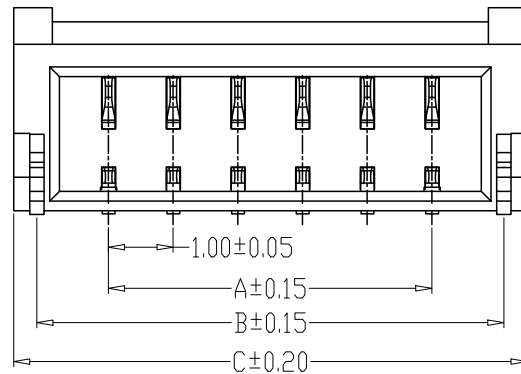

PCB LAYOUT

编 号	尺寸 (mm)		
	A	B	C
A1004WFA-02A	1.00	3.20	4.00
A1004WFA-03A	2.00	4.20	5.00
A1004WFA-04A	3.00	5.20	6.00
A1004WFA-05A	4.00	6.20	7.00
A1004WFA-06A	5.00	7.20	8.00
A1004WFA-07A	6.00	8.20	9.00
A1004WFA-08A	7.00	9.20	10.00
A1004WFA-09A	8.00	10.20	11.00
A1004WFA-10A	9.00	11.20	12.00
A1004WFA-11A	10.00	12.20	13.00
A1004WFA-12A	11.00	13.20	14.00
A1004WFA-20A	19.00	21.20	22.00

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)		制图 (DR)	
1.0超薄卧贴带扣		anlan	
料号 (DWG.NO)		校对 (CHKD)	
		田峰	
		审核 (APPD)	
		黄志明	
比例 (SCALE)	单位 (UNITS)		张数 (SHEET)
	mm		1 OF 1
			SIZE A4
			REV A

一般公差 (TOLERANCE)

X. $\pm .50$	.XX $\pm .10$
.X $\pm .20$	.XXX $\pm .05$
ANGLES	$\pm 1^\circ$

