


HST Size Chart

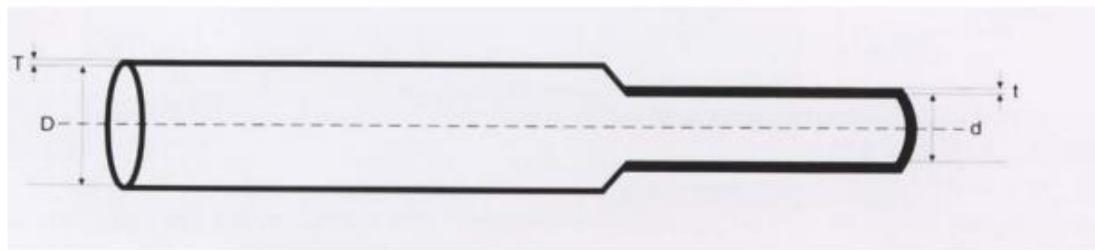

Remark:

1. Printing Contents of HFT type tube:

600V **CB** CB-HFT TUBE E180908 **W** & **CW** 125°C 600V VW-1 -F-
(ΦSize as supplied /Size after recovery)

Size	As Supplied		After Recovery		Packing (m/roll)
	Inside Diameter	Wall-thickness	Inside Diameter	Wall-thickness	
Φ0.8HF	1.3±0.2	0.20±0.05	≤0.50	0.40±0.05	300
Φ1.0HF	1.5±0.2	0.20±0.05	≤0.60	0.40±0.05	200
Φ1.5HF	2.0±0.2	0.20±0.05	≤0.80	0.40±0.05	200
Φ2.0HF	2.5±0.2	0.20±0.05	≤1.00	0.40±0.05	200
Φ2.5HF	3.0±0.2	0.22±0.05	≤1.25	0.44±0.05	200
Φ3.0HF	3.5±0.2	0.25±0.05	≤1.5	0.44±0.05	200
Φ3.5HF	4.0±0.3	0.25±0.05	≤1.75	0.44±0.05	200
Φ4.0HF	4.5±0.3	0.25±0.05	≤2.0	0.48±0.05	200
Φ4.5HF	4.8±0.3	0.25±0.05	≤2.0	0.48±0.05	100
Φ5.0 HF	5.5±0.3	0.25±0.05	≤2.5	0.50±0.05	100
Φ6.0 HF	6.5±0.3	0.25±0.05	≤3.0	0.50±0.05	100
Φ6.5 HF	7.0±0.3	0.30±0.05	≤3.0	0.55±0.05	100
Φ7.0 HF	7.5±0.3	0.30±0.05	≤3.5	0.60±0.05	100

$\Phi 8.0$ HF	8.5 ± 0.3	0.36 ± 0.08	≤ 4.0	0.66 ± 0.08	100
$\Phi 9.0$ HF	9.5 ± 0.3	0.36 ± 0.08	≤ 4.5	0.66 ± 0.08	100
$\Phi 10$ HF	10.5 ± 0.4	0.36 ± 0.08	≤ 5.0	0.66 ± 0.08	100
$\Phi 11$ HF	11.5 ± 0.4	0.36 ± 0.08	≤ 5.5	0.66 ± 0.08	100
$\Phi 12$ HF	12.5 ± 0.4	0.36 ± 0.08	≤ 6.0	0.68 ± 0.08	100
$\Phi 13$ HF	13.5 ± 0.4	0.36 ± 0.12	≤ 6.5	0.68 ± 0.12	100
$\Phi 14$ HF	14.5 ± 0.4	0.36 ± 0.12	≤ 7.0	0.68 ± 0.12	100
$\Phi 15$ HF	15.5 ± 0.4	0.36 ± 0.12	≤ 7.5	0.70 ± 0.12	100
$\Phi 16$ HF	16.5 ± 0.4	0.36 ± 0.12	≤ 8.0	0.70 ± 0.12	100
$\Phi 17$ HF	17.5 ± 0.4	0.36 ± 0.12	≤ 8.5	0.70 ± 0.12	100
$\Phi 18$ HF	18.7 ± 0.5	0.40 ± 0.12	≤ 9.0	0.80 ± 0.12	100
$\Phi 20$ HF	20.6 ± 0.8	0.40 ± 0.12	≤ 10.0	0.80 ± 0.12	100
$\Phi 22$ HF	22.7 ± 0.8	0.46 ± 0.12	≤ 11.0	0.90 ± 0.12	100
$\Phi 25$ HF	25.5 ± 0.8	0.46 ± 0.12	≤ 12.5	0.90 ± 0.12	50
$\Phi 28$ HF	29.2 ± 0.8	0.46 ± 0.12	≤ 14.0	0.90 ± 0.12	50
$\Phi 30$ HF	31.0 ± 0.8	0.46 ± 0.12	≤ 15.0	1.00 ± 0.12	50
$\Phi 35$ HF	≥ 35	0.50 ± 0.15	≤ 19	1.00 ± 0.30	25
$\Phi 40$ HF	≥ 40	0.50 ± 0.15	≤ 21	1.00 ± 0.30	25
$\Phi 50$ HF	≥ 50	0.50 ± 0.15	≤ 27	1.00 ± 0.30	25