BZX85C10 - BZX85C16

ABSOLUTE MAXIMUM RATINGS

Values are at T_A = 25°C unless otherwise noted.

Symbol	Parameter	Value	Unit
PD	Power Dissipation @ $T_A = 25^{\circ}C$	1.0	W
	Power Dissipation @ T _L = 25°C at 4 mm distance from the glass package	1.3	
	Derate above 50°C	6.67	mW/°C
T _J , T _{STG}	Operating Junction Temperature Range	-65 to +200	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.




ON Semiconductor®

www.onsemi.com



AXIAL LEAD / DO-41 CASE 017AH

MARKING DIAGRAM

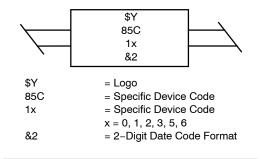

ORDERING INFORMATION

See detailed ordering and shipping information on page 2 of this data sheet.

1

BZX85C10 - BZX85C16

Zener Voltage (Note 1)		Zener Impedance			Leakage Current		
V _Z (V)		Ιz	Z _Z @ I _Z	Z _{ZK} @ I _{ZK}		I _R @ V _R	
Min.	Max.	mA	(Ω)	(Ω)	(mA)	μA Max.	v
9.4	10.6	25	7	200	0.5	0.5	7
10.4	11.6	20	8	300	0.5	0.5	7.7
11.4	12.7	20	9	350	0.5	0.5	8.4
12.4	14.1	20	10	400	0.5	0.5	9.1
13.8	15.6	15	15	500	0.5	0.5	10.5
15.3	17.1	15	15	500	0.5	0.5	11
-	Vz Min. 9.4 10.4 11.4 12.4 13.8	Vz (V) Min. Max. 9.4 10.6 10.4 11.6 11.4 12.7 12.4 14.1 13.8 15.6	Vz (V) Iz Min. Max. mA 9.4 10.6 25 10.4 11.6 20 11.4 12.7 20 12.4 14.1 20 13.8 15.6 15	Vz (V)IzZz @ IzMin.Max.mA(Ω)9.410.625710.411.620811.412.720912.414.1201013.815.61515	Vz (V) Iz Zz @ Iz Zzκ Min. Max. mA (Ω) (Ω) 9.4 10.6 25 7 200 10.4 11.6 20 8 300 11.4 12.7 20 9 350 12.4 14.1 20 10 400 13.8 15.6 15 15 500	Vz (V) Iz Zz @ Iz Zzκ @ Izκ Min. Max. mA (Ω) (Ω) (mA) 9.4 10.6 25 7 200 0.5 10.4 11.6 20 8 300 0.5 11.4 12.7 20 9 350 0.5 12.4 14.1 20 10 400 0.5 13.8 15.6 15 15 500 0.5	Vz (V) Iz Zz @ Iz Zz @ Iz Zz @ Iz Ia Ia <thia< th=""> Ia <thia< th=""> <thia< td="" th<=""></thia<></thia<></thia<>

ELECTRICAL CHARACTERISTICS Values are at $T_A = 25^{\circ}C$ unless otherwise noted.

Zener Voltage (V_Z). The zener voltage is measured with the device junction in the thermal equilibrium at the lead temperature (T_L) at 30°C ±1°C and 3/8″ lead length.

MARKING INFORMATION


Device	Line 1	Line 2	Line 3	Line 4	Line 5
BZX85C10	LOGO	85C	10		XY
BZX85C11			11		
BZX85C12			12		
BZX85C13			13		
BZX85C15			15		
BZX85C16			16		

ORDERING INFORMATION

Part Number	Package	Shipping [†]
BZX85C10	Axial Lead / DO-41	3000 / Bulk Bag
BZX85C10-T50R		3000 / Tape & Reel
BZX85C11		3000 / Bulk Bag
BZX85C12		3000 / Bulk Bag
BZX85C12-T50R		3000 / Tape & Reel
BZX85C13		3000 / Bulk Bag
BZX85C15		3000 / Bulk Bag
BZX85C15-T50A		3000 / Fan-Fold
BZX85C15-T50R]	3000 / Tape & Reel
BZX85C16		3000 / Bulk Bag

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



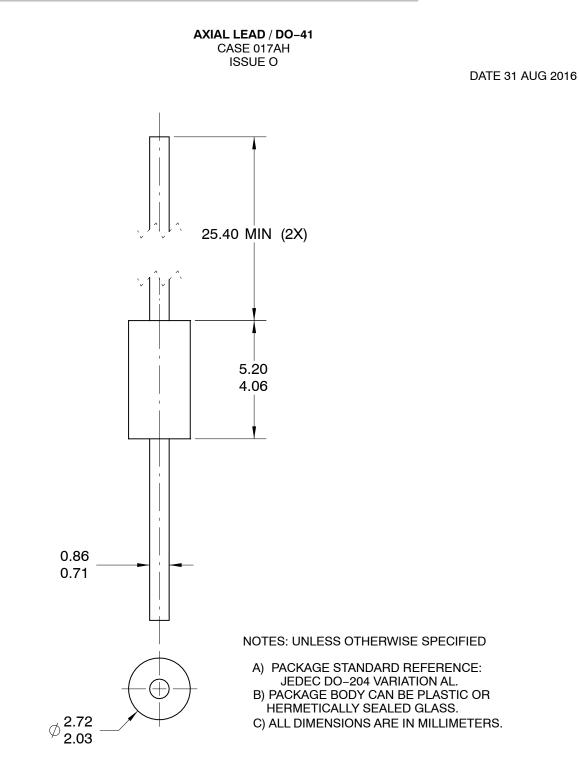

DOCUMENT NUMBER:	98AON13444G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.				
DESCRIPTION:	AXIAL LEAD / DO-41		PAGE 1 OF 1			
ON Semiconductor and ware trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.						

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor date sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use a a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor houteds for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

TECHNICAL SUPPORT

ON Semiconductor Website: www.onsemi.com

Email Requests to: orderlit@onsemi.com

North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada Phone: 011 421 33 790 2910 Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910 For additional information, please contact your local Sales Representative