
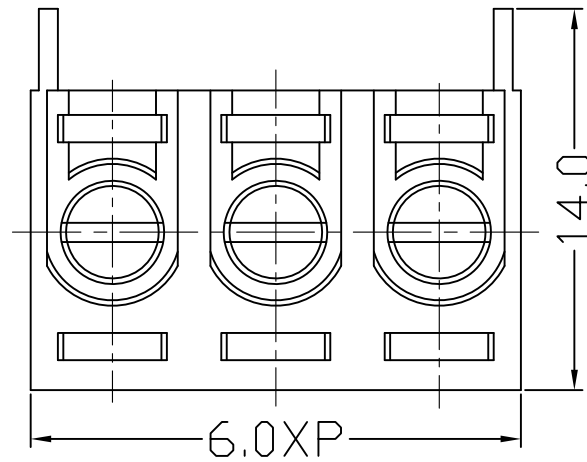
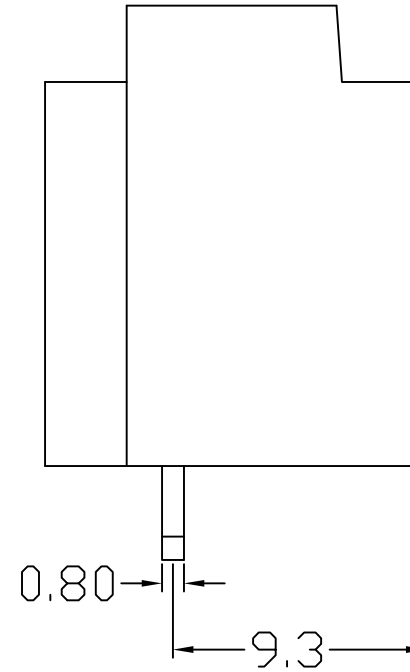


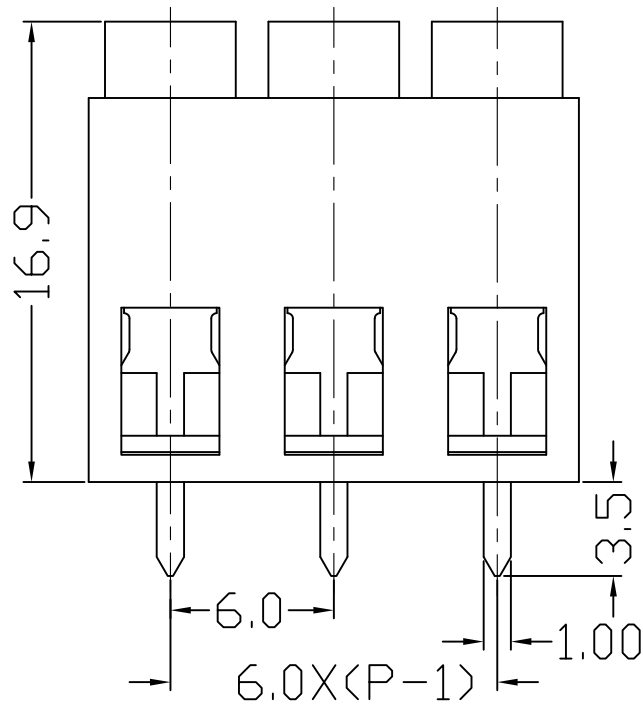

300V 15A 24-12AWG 2.5mm²

Poles: 2P, 3P

Pitch: 6.0mm(.236")

Materials

Housing: PA66(UL 94V-0)

Solder Pin: Brass, Tin Plated

Wire Cage: Brass, Nickel Plated

Screw: M3, Steel (A3), Zinc Plated

Torque: 0.5N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance					
						x.	±0.2	x."	±2°
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD	图名/Title CM 20/41 2P CM 20/43 3P 产品图	文件编号/File No. QJ/XYT-2244100 QJ/XYT-2244200	页序/Sheet			.x	±0.1	.x°	±1°
						.xx	±0.05	.xx°	±0.5°
						.xxx	±0.01		
备注/Remark		单位/Units: mm							

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------