

序号	品名	材质
①	DF16立式贴片WTB胶芯	LCP UL94V-0 本色
②	DF16立式贴片WTB端子	铜合金/表面镀锡
③	DF16立式贴片WTB铜片	铜合金/表面镀锡
④	DF16立式贴片WTB吸盘	LCP UL94V-0 本色

技术指标(Technical Index):

- 温度范围(Temperature range): $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 额定电压(Rated voltage): 150V, AC, DC.
- 额定电流(Rated current): 1.0A AC, DC.
- 接触电阻(Contact resistance): $\leq 20\text{m}\Omega$.
- 耐压值(Withstanding voltage): 500V AC/minute.
- 绝缘电阻(Insulation resistance): $\geq 500\text{M}\Omega$.
- 产品料号(Product material No.):

WT125FL—*** **—***

NO OF CKT(产品PIN数)

00	胶芯有LOGO:WD
0W	胶芯无LOGO

Plating(电镀方式)







Packing(包装方式)

- 1.端子全金(G/F OVERALL)
4.端子全亮锡
C:TAPE & REEL WITH COVER
加吸盖卷装

T:TUBE管装

大于3Pin结构

2~3Pin结构

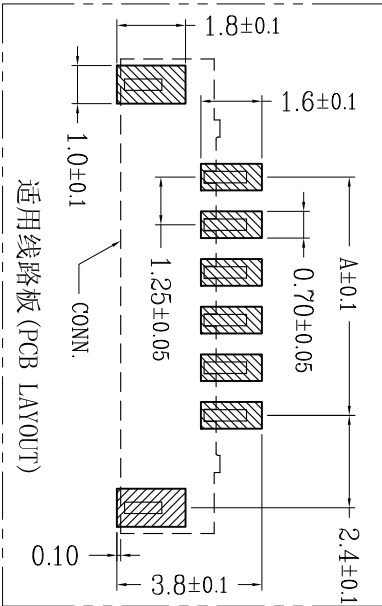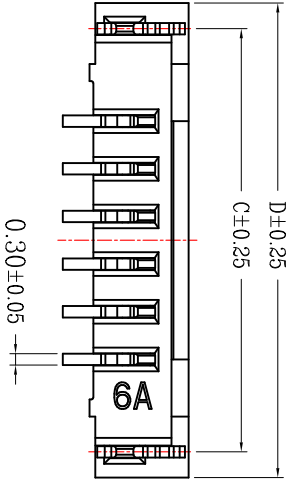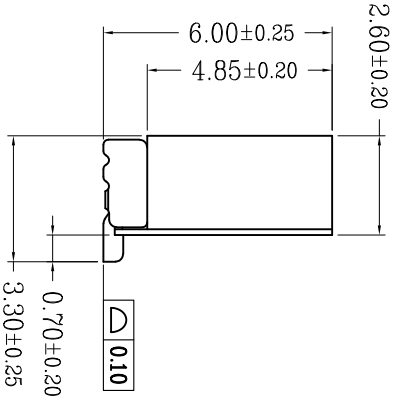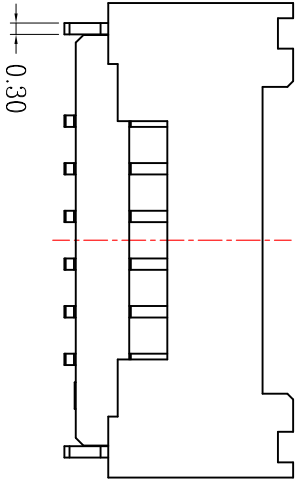

CKT	A	B	C	D
2	1.25	3.05	6.10	7.45
3	2.50	4.30	7.35	8.70
4	3.75	5.55	8.60	9.95
5	5.00	6.80	9.85	11.20
6	6.25	8.05	11.10	12.45
7	7.50	9.30	12.35	13.70
8	8.75	10.55	13.60	14.95
9	10.00	11.80	14.85	16.20
10	11.25	13.05	16.10	17.45
11	12.50	14.30	17.35	18.70
12	13.75	15.55	18.60	19.95
13	15.00	16.80	19.85	21.20
14	16.25	18.05	21.10	22.45
15	17.50	19.30	22.35	23.70
16	18.75	20.55	23.60	24.95
18	21.25	23.05	26.10	27.45
20	23.75	25.55	28.60	29.95
30	36.25	38.05	41.10	42.45



ZGWPD

浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)
1.25 Pitch DF16立式贴片WTB

制图 (DR)

ANLAN

料号 (DWG.NO)

WT125FL—*** **—***

审核 (APPD)

李绍宗

比例 (SCALE)

1:1

单位 (UNITS)

mm

张数 (SHEET)

1 Of 1

尺寸 (SIZE)

A4

REV

A

一般公差 (TOLERANCE)
X: ± 0.50 XX: ± 0.10
Y: ± 0.20 XXX: ± 0.05
ANGLES: $\pm 1^{\circ}$