


F		
序号	品名	材质
①	HA2. 5弯针WTB胶芯	PA66 UL94V-0 米色 白色
②	XH2. 5直针WTB端子	铜合金/表面镀锡

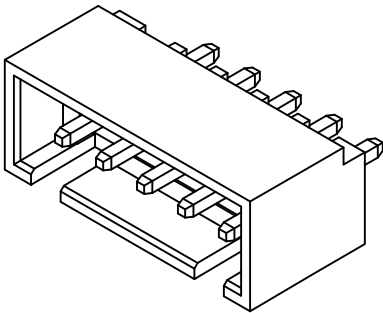


CKT	A	B	CKT	A	B
2	2.5	7.5	10	22.5	27.5
3	5.0	10.0	11	25.0	30.0
4	7.5	12.5	12	27.5	32.5
5	10.0	15.0	13	30.0	35.0
6	12.5	17.5	14	32.5	37.5
7	15.0	20.0	15	35.0	40.0
8	17.5	22.5	16	37.5	42.5
9	20.0	25.0	17	40.0	45.0

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)		制图 (DR)	
HA2. 5直针WTB		ANLAN	
料号 (DWG.NO)		校对 (CHKD)	
WT250KL-****-**		李绍宗	
比例 (SCALE)		审核 (APPD)	
1:1		黄志明	
单位 (UNITS)	mm	张数 (SHEET)	SIZE
		1 OF 1	A4
			REV
			A




一般公差 (TOLERANCE)
X. ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

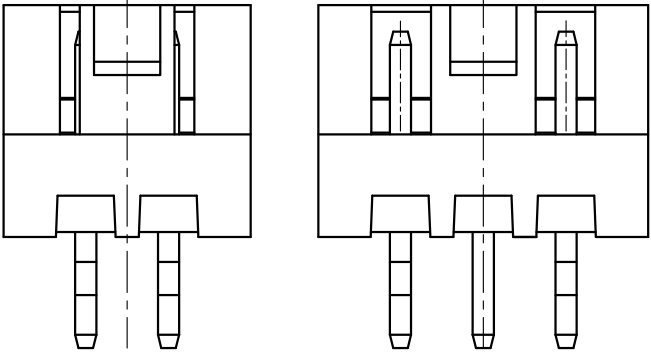


2PiN

3PiN

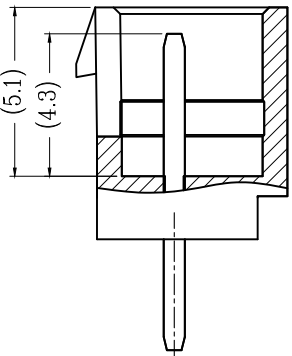


SECTION A-A

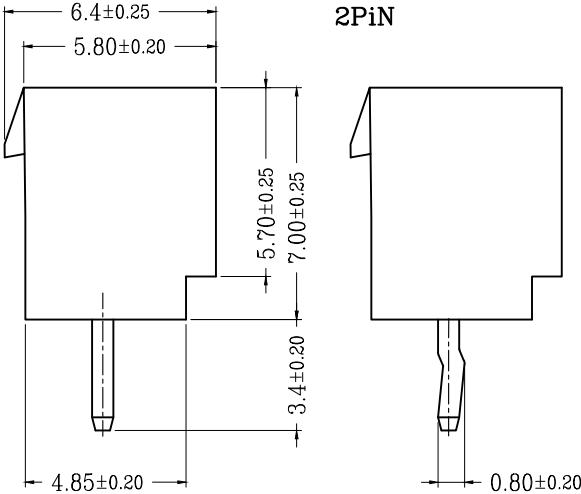


TYPE 1 (无K脚)

TYPE 2 (打K脚)

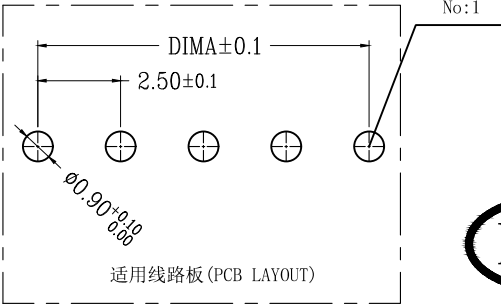

适用线路板 (PCB LAYOUT)

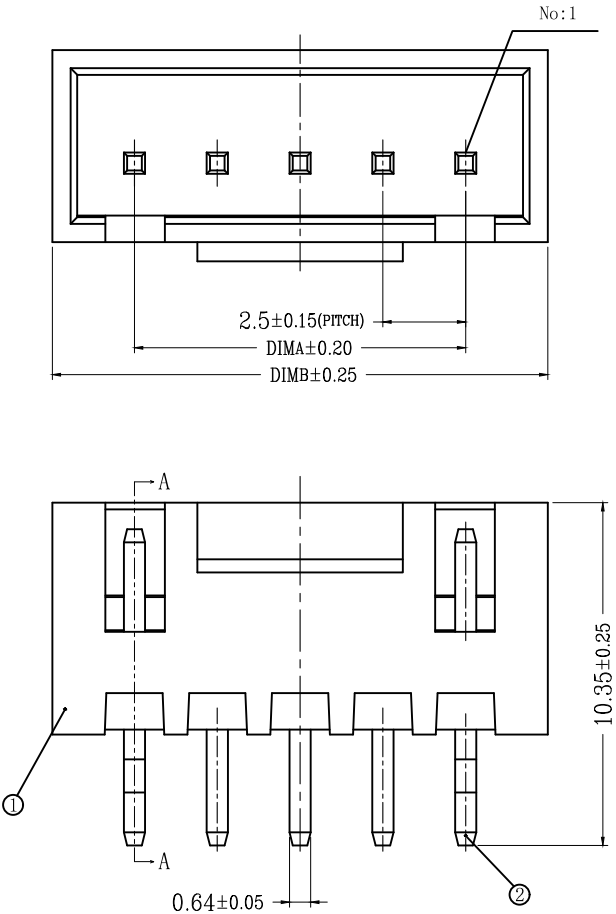

技术指标 (Technical Index):

- 温度范围 (Temperature range): -25° C ~ +85° C.
- 额定电压 (Rated voltage): 250V, AC.
- 额定电流 (Rated current): 3.0A AC, DC.
- 接触电阻 (Contact resistance): ≤ 20mΩ.
- 耐压值 (Withstanding voltage): 1000V AC/minute.
- 绝缘电阻 (Insulation resistance): ≥ 1000MΩ.
- 产品料号 (Product material No.):

WT250KL-**-**-**

DP	DIP型无K脚, 高温料无LOGO
D9	DIP型无K脚, 低温料无LOGO
DK	DIP型打K脚, 高温料无LOGO
K9	DIP型打K脚, 低温料无LOGO

NO OF CKT (产品PIN数)

Plating (电镀方式)
4: 端子全亮锡
(Terminal all bright tin)

Packing (包装方式)
P: PE袋装/盒装