
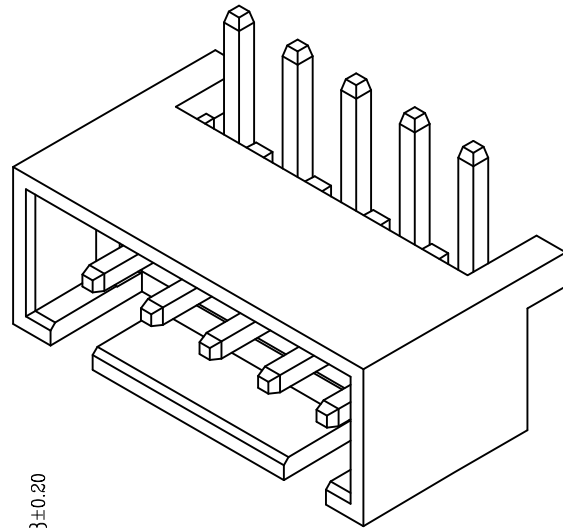
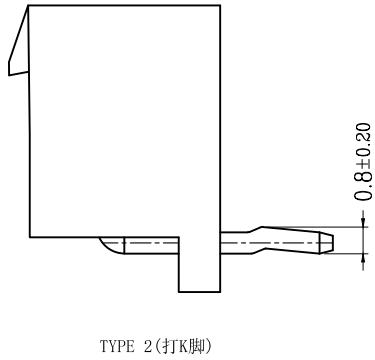
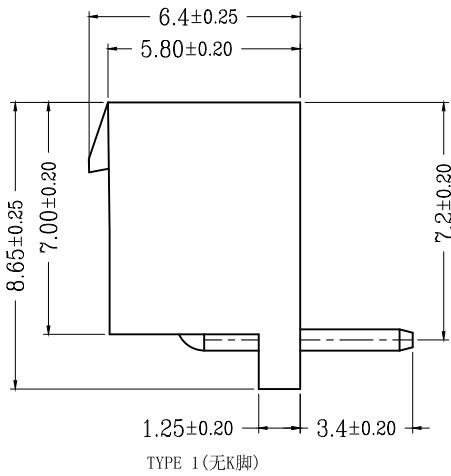
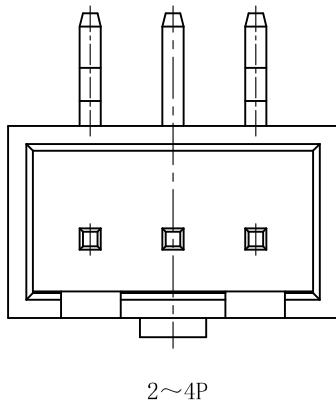
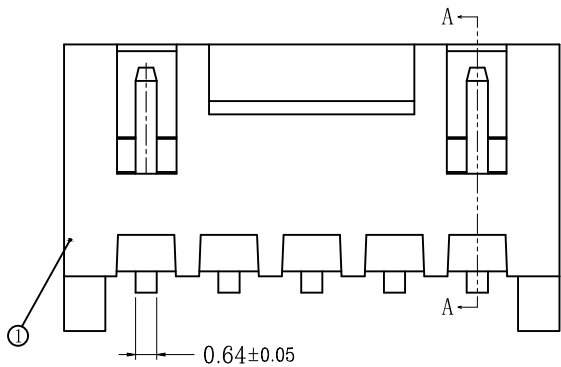


版次	变更摘要	日期
0	新产品发行	2019/07/20

序号	品名	材质
①	HA2.5弯针WTB胶芯(高角)	PA66 UL94V-0 米色 白色
②	XH2.5弯针WTB端子	铜合金/表面镀锡

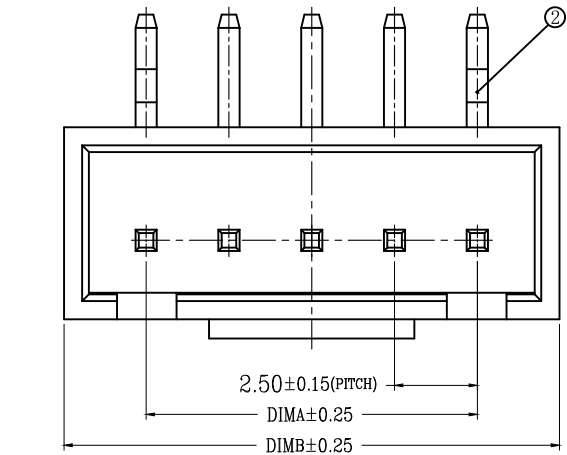

技术指标(Technical Index):

1. 温度范围(Temperature range): -25° C~+85° C.
2. 额定电压(Rated voltage): 250V, AC.
3. 额定电流(Rated current): 3.0A AC, DC.
4. 接触电阻(Contact resistance): ≤20mΩ .
5. 耐压值(Withstanding voltage): 1000V AC/minute.
6. 绝缘电阻(Insulation resistance): ≥1000MΩ.
7. 产品料号(Product material No.):



WT250KW—** * **—**	HP	DIP型无K脚, 高温料无LOGO
	H9	DIP型无K脚, 低温料无LOGO
	GK	DIP型打K脚, 高温料无LOGO
	G9	DIP型打K脚, 低温料无LOGO

NO OF CKT (产品PIN数) ————

Plating (电镀方式) ————

4: 端子全亮锡
(Terminal all bright tin)

Packing (包装方式)
P: PE袋装/盒装

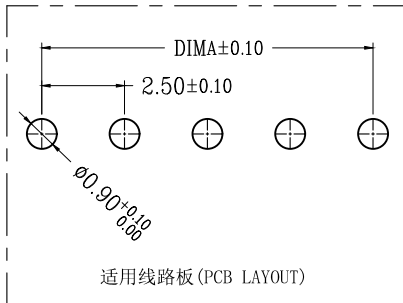

SECTION A-A



一般公差 (TOLERANCE)
X: ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

CKT	A	B	CKT	A	B
2	2.5	7.5	10	22.5	27.5
3	5.0	10.0	11	25.0	30.0
4	7.5	12.5	12	27.5	32.5
5	10.0	15.0	13	30.0	35.0
6	12.5	17.5	14	32.5	37.5
7	15.0	20.0	15	35.0	40.0
8	17.5	22.5	16	37.5	42.5
9	20.0	25.0			

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)	HA2.5弯针WTB(高角)	制图 (DR)	ANLAN
料号 (DWG.NO)	WT250KW-****-**	校对 (CHKD)	李绍宗
比例 (SCALE)	1:1	审核 (APPD)	黄志明
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
尺寸 (SIZE)	A4	版本 (REV)	A