






Hydroponics

reduction ratio 1:8

Through plate fixation
and L plate installation

The actual product has the color value

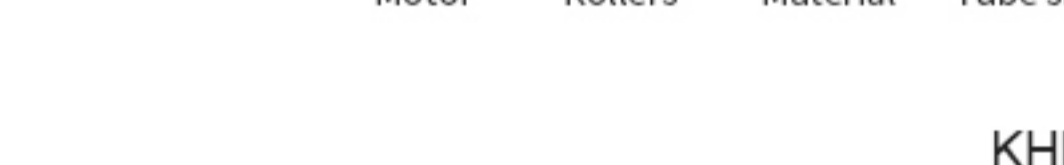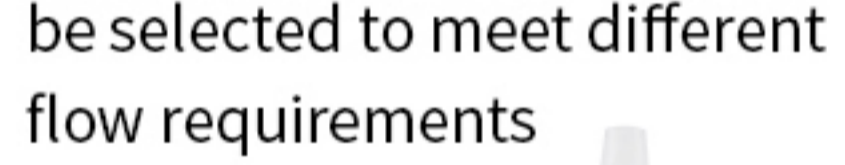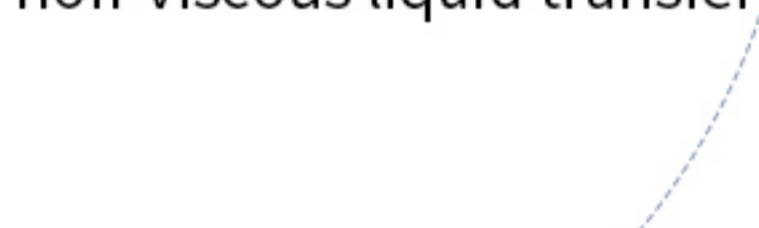

Code

Tubing

Note: The above test data was measured at a speed of 380 rpm with no interruption and the room temperature was 20°C pure water without pressure until the pump pipe broke. The pump head speed varies with the life of the pump tube. In general, the slower the pump head speed is, the longer the pump tube life is. The actual service life is affected by factors such as medium,

working conditions, temperature and humidity, voltage, and the test data is used for reference.

Code	S16	S40
------	-----	-----


Current 0.8A		
--------------	--	--

Working conditions:

Working conditions:
Ambient temperature: 0 ~ 40°C
Relative humidity: <80%

Discussion

(Through plate installation)

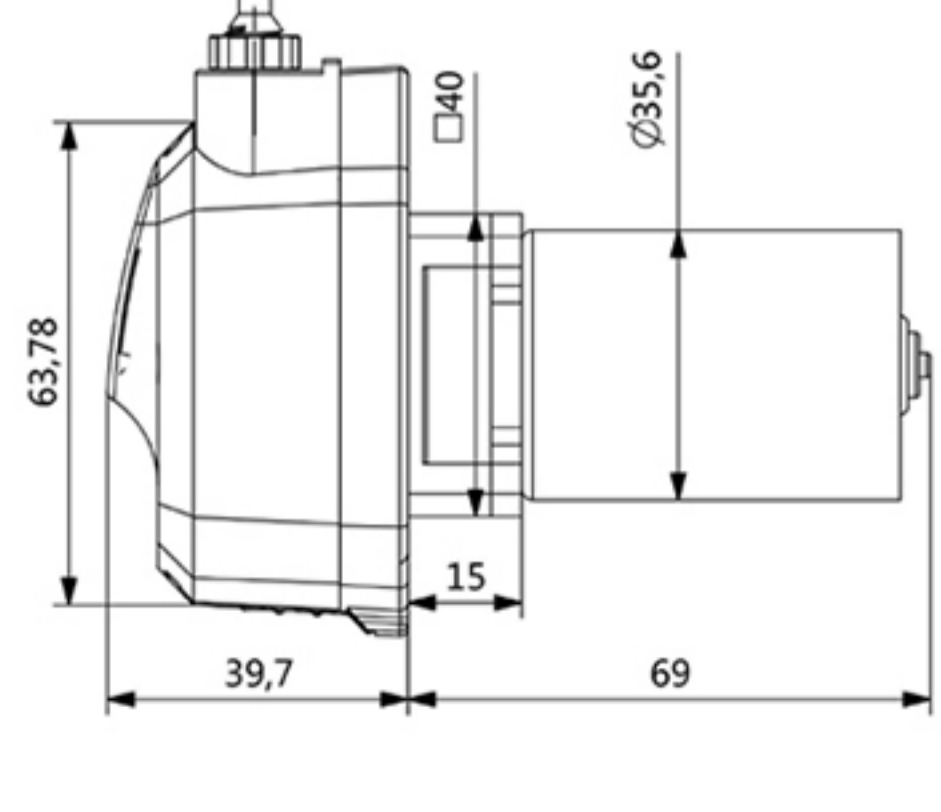

(L plate installation)

