

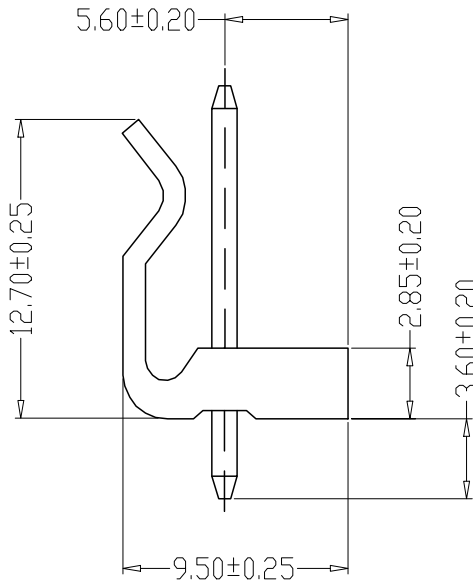
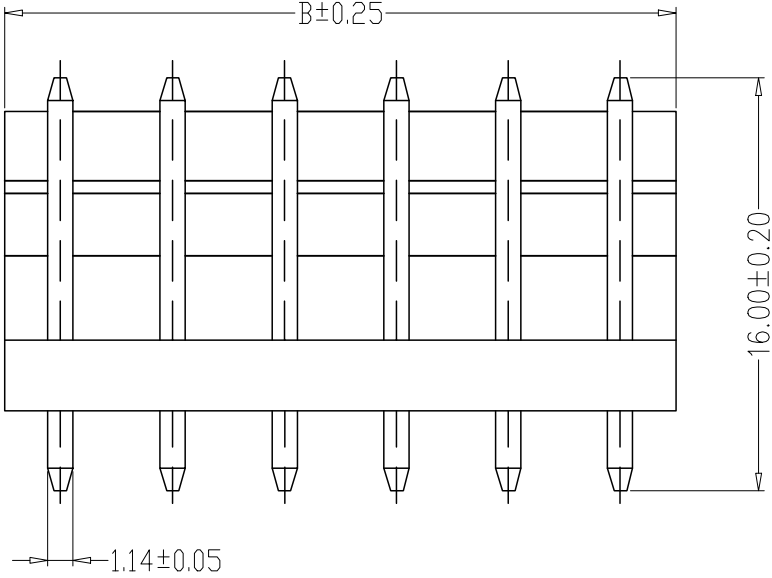


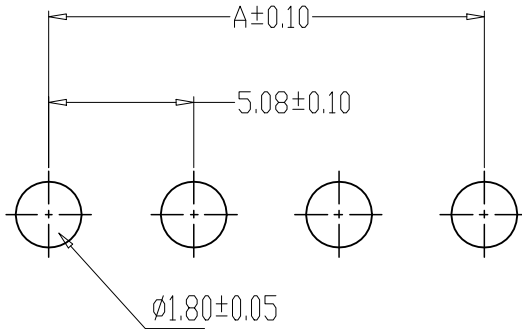

SPECIFICATIONS

- 1、Current Rating:7A AC,DC
- 2、Voltage Rating:250V AC,DC
- 3、Temperatuer Range:-25℃~+85℃
- 4、Contact Resistance:20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、withstanding Voltang: 1500V AC/minute
- 7、Material:Wafer Nylon66,UL94V-0PIN Brass Tin-plated

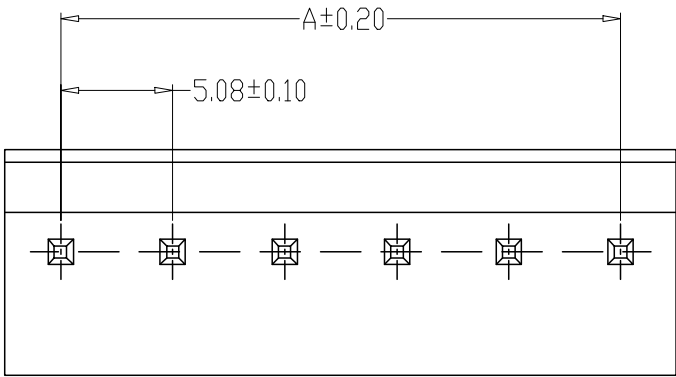

PCB LAYOUT

编 号	尺寸 (mm)	
	A	B
A5801-02A	5.08	10.16
A5801-03A	10.16	15.24
A5801-04A	15.24	20.32
A5801-05A	20.32	25.40
A5801-06A	25.40	30.48
A5801-07A	30.48	35.56
A5801-08A	35.56	40.64
A5801-09A	40.64	45.72
A5801-10A	45.72	50.80
A5801-11A	50.80	55.88
A5801-12A	55.88	60.96
A5801-20A	96.52	101.60

ZGWD 浙江温达电子有限公司 ZHEJIANG WENDA ELECTRONICS CO., LTD	
品名 (TITLE) 5.08直针	制图 (DR) Anlan
料号 (DWG.NO)	校对 (CHKD) 田峰
	审核 (APPD) 黄志明
比例 (SCALE)	单位 (UNITS) mm
张数 (SHEET) 1 OF 1	尺寸 (SIZE) A4
REV A	



一般公差 (TOLERANCE)
X. ±.50 .XX ±.10
X. ±.20 .XXX ±.05
ANGLES ±1°