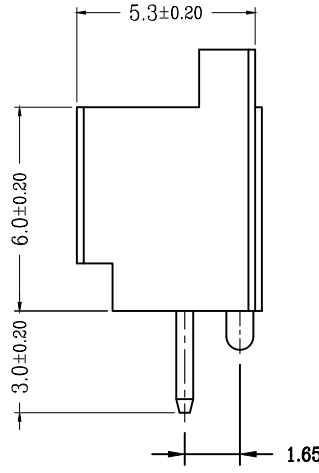
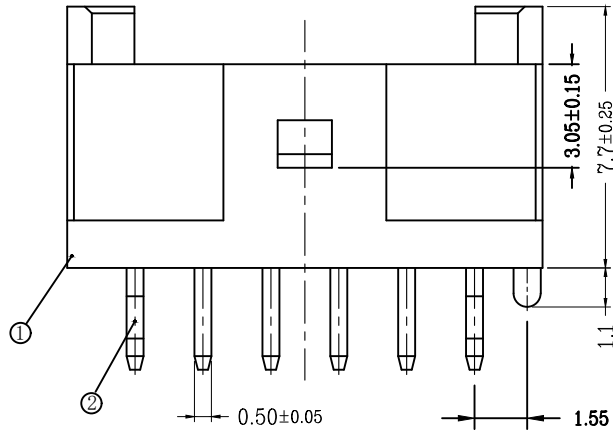
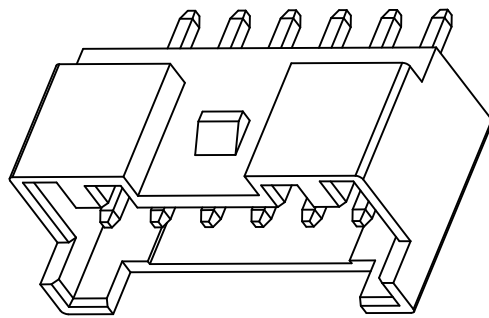
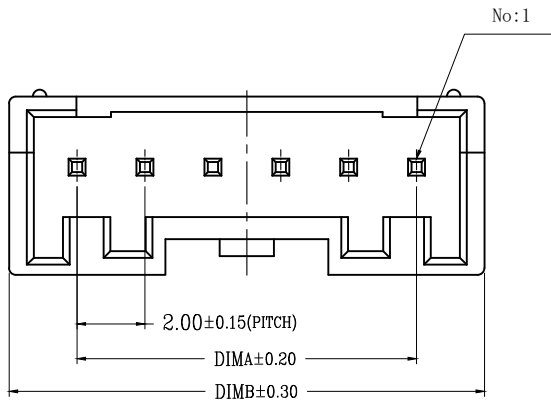


TYPE 1 (无K脚)

TYPE 2 (打K脚)

技术指标(Technical Index):

1. 温度范围(Temperature range): -25° C~+85° C.
2. 额定电压(Rated voltage): 250V, AC.
3. 额定电流(Rated current): 3.0A AC, DC.
4. 接触电阻(Contact resistance): ≤20mΩ .
5. 耐压值(Withstanding voltage): 800V AC/minute.
6. 绝缘电阻(Insulation resistance): ≥1000MΩ.
7. 产品料号(Product material No.):

WT200RL—** * *—**

NO OF CKT(产品PIN数)

Plating(电镀方式)

1: 端子镀金G/F


4: 端子全亮锡

(Terminal all bright tin)

Packing(包装方式)

P: PE袋装/盒装

DP	DIP型无K脚, 高温料无LOGO
D9	DIP型无K脚, 低温料无LOGO
DK	DIP型打K脚, 高温料无LOGO
K9	DIP型打K脚, 低温料无LOGO

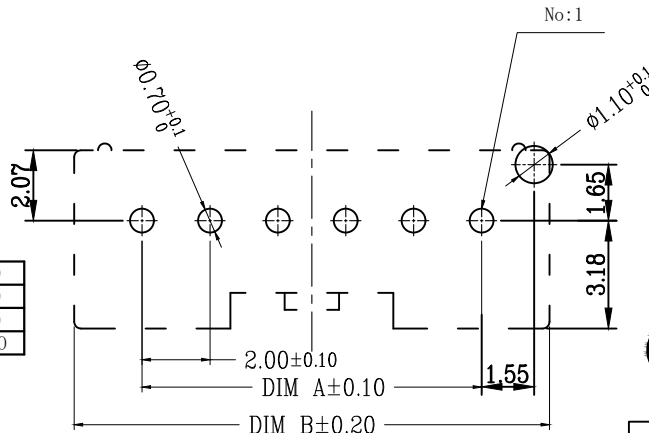

适用线路板(PCB LAYOUT)




一般公差(TOLERANCE)
X ±.50 XX ±1.0
X ±.20 .XXX ±.05
ANGLES ±1°


版次	变更摘要
0	新产品发行

日期
2020/08/26


序号	品名	材质
①	PA2.0直针WTB胶芯	PA66 UL94V-0 LCP UL94V-0 本色/米色/白色
②	PA2.0直针WTB端子	铜合金/表面镀锡



7P-8P
SCALE 1:0.6



9P-10P
SCALE 1:0.6



11P-16P
SCALE 1:0.6

CKT	A	B	CKT	A	B
2	2.0	6.0	10	18.0	22.0
3	4.0	8.0	11	20.0	24.0
4	6.0	10.0	12	22.0	26.0
5	8.0	12.0	13	24.0	28.0
6	10.0	14.0	14	26.0	30.0
7	12.0	16.0	15	28.0	32.0
8	14.0	18.0	16	30.0	34.0
9	16.0	20.0	18	34.0	38.0

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO.,LTD

品名 (TITLE)	PA2.0直针WTB	制图 (DR)	Anlan
料号 (DWG.NO)	WT200RL-****-**	校对 (CHKD)	李绍宗
比例 (SCALE)	1:1	审核 (APPD)	黄志明
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
尺寸 (SIZE)	A4	版本 (REV)	A