
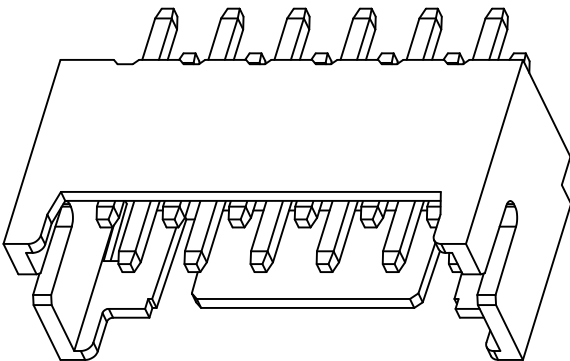




D		E	F		
版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2018/09/16	①	PHD2.0直针WTB胶芯	PA66 UL94V-0 米色
			②	PHD2.0直针WTB端子	铜合金/表面镀锡&镀金

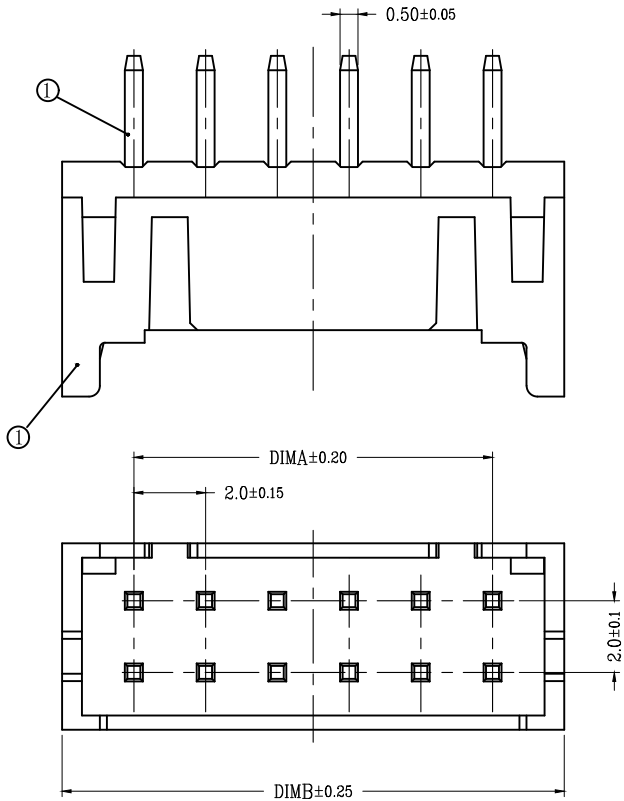

CKT	A	B
2*2	2.0	6.0
2*3	4.0	8.0
2*4	6.0	10.0
2*5	8.0	12.0
2*6	10.0	14.0
2*7	12.0	16.0
2*8	14.0	18.0
2*9	16.0	20.0
2*10	18.0	22.0
2*11	20.0	24.0
2*12	22.0	26.0
2*13	24.0	28.0
2*14	26.0	30.0
2*15	28.0	32.0
2*16	30.0	34.0
2*18	34.0	38.0
2*20	38.0	42.0

技术指标(Technical Index):

- 工作温度(Temperature range): -25° C~+85° C.
- 额定电压(Rated voltage): 250V DC/AC(rms).
- 额定电流(Rated current): 3.0A AC, DC.
- 接触电阻(Contact resistance): ≤20mΩ.
- 耐压值(Dielectricwithstanding voltage): 800V AC/minute.
- 绝缘电阻(Insulation resistance): ≥1000MΩ.
- 产品料号(Product material No.):

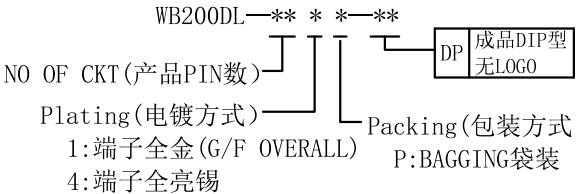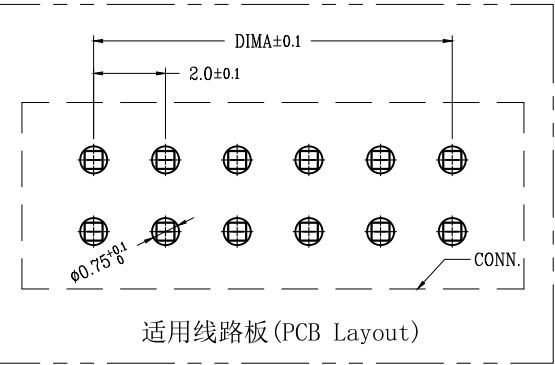

ZGWD 浙江温达电子有限公司					
ZHEJIANG WENDA ELECTRONICS CO., LTD					
品名 (TITLE)			制图 (DR)		
PHD2.0 双排直插WTB			Anlan		
料号 (DWG.NO)			校对 (CHKD)		
WB200DL-****-***			李绍宗		
比例 (SCALE)			审核 (APPD)		
1:1			黄志明		
单位 (UNITS)		张数 (SHEET)		SIZE	
mm		1 OF 1		A4	
				REV	
				A	