

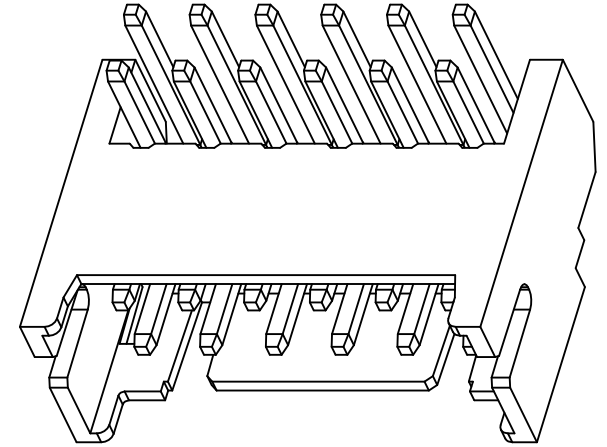


版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2018/09/16	①	PHDC2.0弯针WTB胶芯	PA66 UL94V-0 米色 LCP
			②	PHDC2.0弯针WTB端子	铜合金/表面镀锡

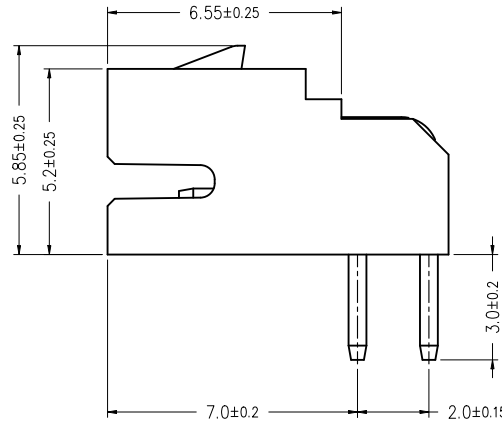

CKT	A	B
2*2	2.0	6.0
2*3	4.0	8.0
2*4	6.0	10.0
2*5	8.0	12.0
2*6	10.0	14.0
2*7	12.0	16.0
2*8	14.0	18.0
2*9	16.0	20.0
2*10	18.0	22.0
2*11	20.0	24.0
2*12	22.0	26.0
2*18	34.0	38.0
2*20	38.0	42.0

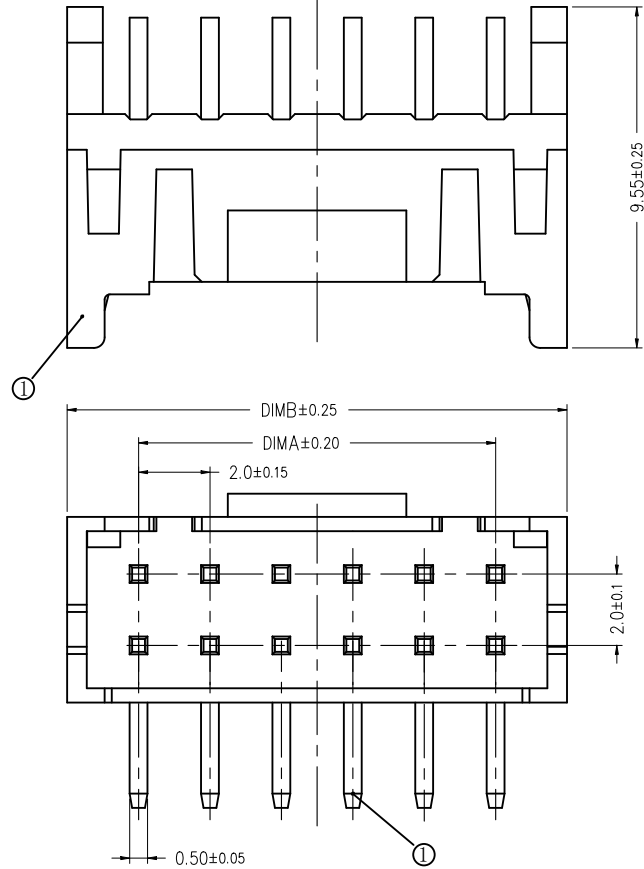

技术指标 (Technical Index):

- 工作温度 (Temperature range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
- 额定电压 (Rated voltage): 250V DC/AC(rms).
- 额定电流 (Rated current): 3.0A AC, DC.
- 接触电阻 (Contact resistance): $\leq 20\text{m}\Omega$.
- 耐压值 (Dielectric withstanding voltage): 800V AC/minute.
- 绝缘电阻 (Insulation resistance): $\geq 1000\text{M}\Omega$.
- 产品料号 (Product material No.):

WB200CW-*** ** **

NO OF CKT (产品PIN数)

Plating (电镀方式)

4: 端子全亮锡

(Terminal all bright tin)

Packing (包装方式)
P: BAGGING 袋装

DP 成品DIP型无LOGO
CO LCP料



一般公差 (TOLERANCE)
X. ± 50 .XX ± 10
X. ± 20 .XXX ± 05
ANGLES $\pm 1^{\circ}$

适用线路板 (PCB Layout)

ZGWD 浙江温达电子有限公司 ZHEJIANG WENDA ELECTRONICS CO., LTD			
品名 (TITLE) PHDC2.0 双排弯针WTB		制图 (DR) Anlan	
料号 (DWG.NO) WB200CW-****-***		校对 (CHKD) 李绍宗	
比例 (SCALE) 1:1		审核 (APPD) 黄志明	
单位 (UNITS) mm		张数 (SHEET) 1 OF 1	SIZE A4
			REV A