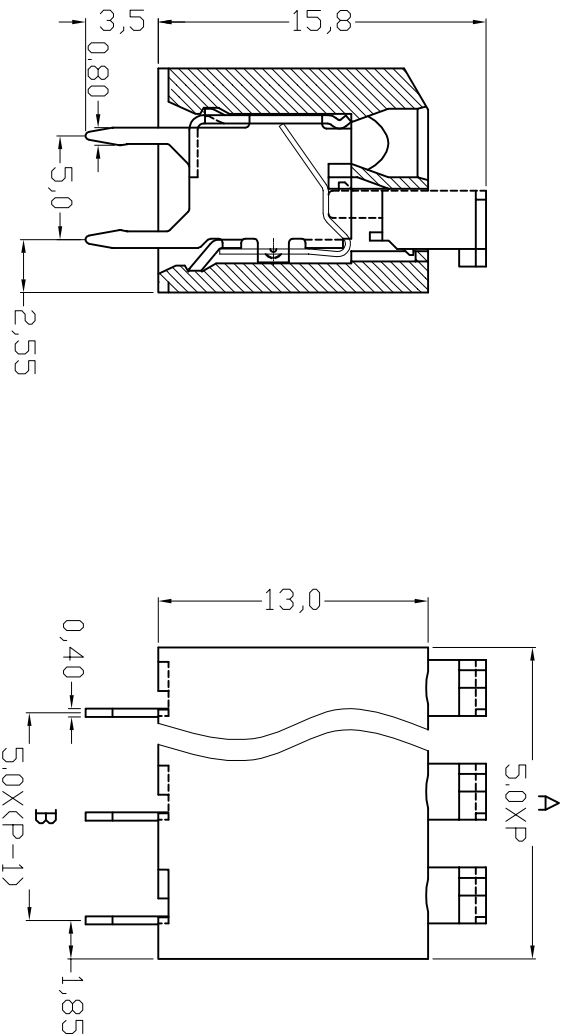


300V 8A 20-16AWG 1.5mm²
Poles: 2P-8P
Pitch: 5.0mm(.197")
Materials
Housing: PA66(UL 94V-0)
Solder Pin: Copper,Tin Plated
Clamping: Stainless steel

Pin	2	3	4	5	6	7	8
A±0.1	10.0	15.0	20.0	25.0	30.0	35.0	40.0
B±0.05	5.0	10.0	15.0	20.0	25.0	30.0	35.0

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLAIVA ELECTRONIC CO.,LTD		图名/Title	文件编号/File No.	X: ±0.2	X: ±2°
		XY117A 5.0		.X ±0.1	.X° ±1°
				.XX ±0.05	.XX° ±0.5°
				.XXX ±0.01	
备注/Remark		页序/Sheet		单位/Units: mm	