
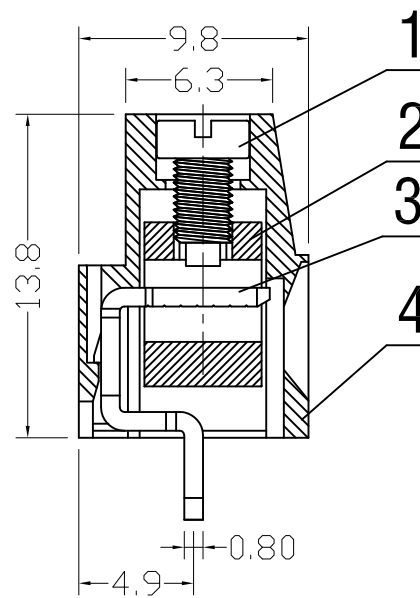
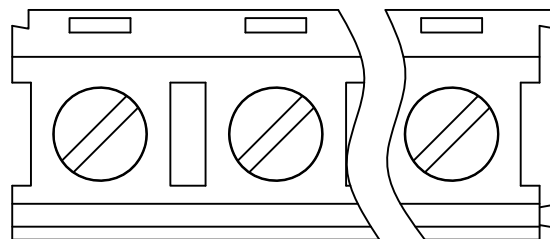


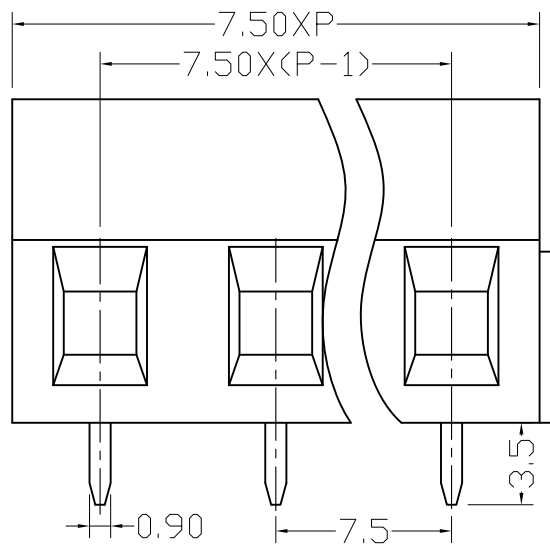

序号/RevNo.	名称 /Title	文件编号 /File No.
1	XY103 螺丝	QJ/XYT-2140104
2	XY128 铜方块	QJ/XYT-2140102
3	XY128V-A 端子	QJ/XYT-2140103
4	XY128B 塑件	QJ/XYT-2140202

Technical data:

Wire range:24-12AWG 2.5mm²

Voltage&Current: 300V 15A

Withstand Voltage: AC2000V/Min

Poles: (2P,3P-24P)

Pitch: 7.5mm(.295")

Materials

Housing: PA66(UL 94V-0)

Solder Pin: Brass,Tin Plated

Wire Cage: Brass,Nickel Plated

Screw: M2.5,Steel(A3),Zinc Plated

Useing

Operating Temperature: -40℃ ~ +105℃


Pollution Level: III

Soldering temperature:260±5/5sec

Hand Soldering: soldering iron350℃/10s

Torque: 0.4N.m

Strip Length: 6-7mm

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance			
 XINLAIYA ELECTRONIC CO.,LTD		图名 /Title		文件编号 /File No.		x _s ± 0.2 x _s ⁻ ± 2°	
		XY128VB-7.5 产品图		QJ/XYT-2240500		.x ± 0.1 .x ⁻ ± 1°	
						.xx ± 0.05 .xx ⁻ ± 0.5°	
						.xxx ± 0.01	
备注 /Remark		页序 /Sheet		单位 /Units:		mm	

序号 /RevNo.	更改记录 /Revision note	签名 /Signature	日期 /Date
------------	---------------------	---------------	----------