
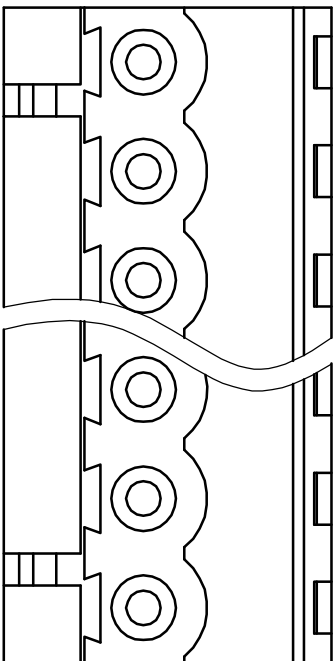
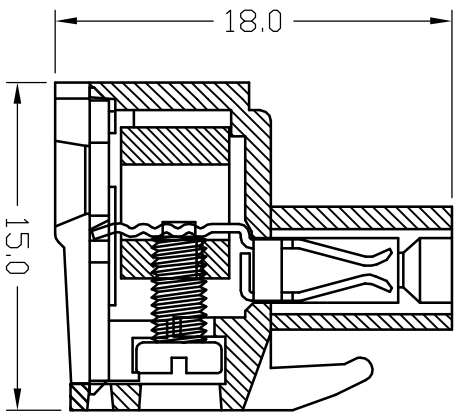


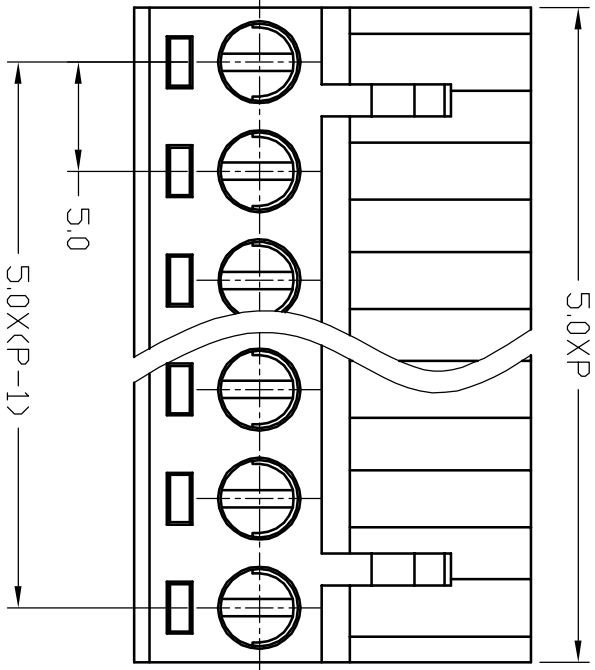

300V 15A 2.5mm² 28-12AWG
Poles: 2-22P
Pitch: 5.0mm(.197")

Materials

Housing: PA66 (UL 94V-0)
Contact: Phosphor Bronze, Nickel Plated.
Wire Cage: Brass(Nickel Plated) or Steel(zinc plated)
Screw: M2.5, Steel, A3 Zinc Plated.

序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date				
				设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by
				图名/Title		文件编号/FILE No.	
				XY2500FAT		QJ/XYT-2272100	
				备注/Remark		页序/Sheet	
				单位/Unit:		mm	
				未注公差			
				General Tolerance			
				x		x	
				x		x	
				xx		xx	
				xxx		xxx	
				0.2		±2	
				0.1		1	
				0.05		±0.5	
				0.01			