
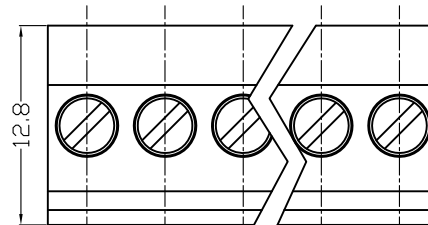
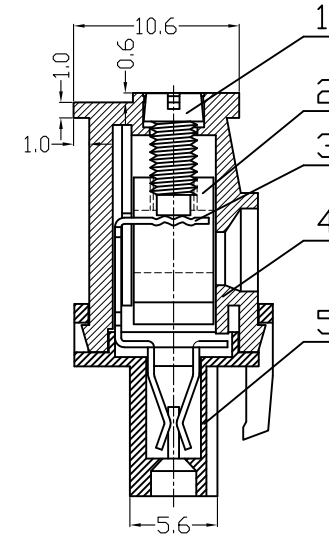
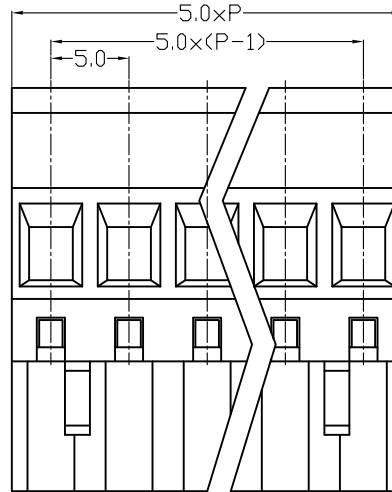
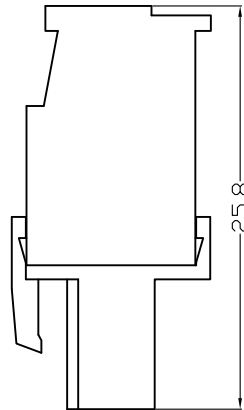


序号 /RevNo.	名称 /Title	文件编号 /File No.
1	XY2500F 螺丝(B)	
2	XY2500F铜 方块(B)	
3	XY2500F簧片(B)	
4	XY2500FAVS 塑件主体	
5	XY2500FA 塑件后盖	

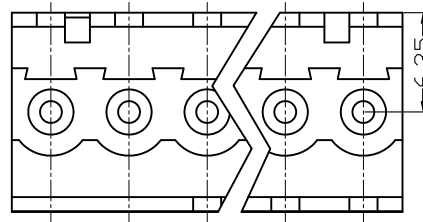

300V 15A 2.5mm² 28-12AWG
Poles: 2-24P
Pitch: 5.0mm(.197")
Withstanding Voltage: 2500V/Min
Oper ating temperature: -40 °Cto +105 °C
Torque: 4.4Lb-In./0.5Nm

Materials

Housing: PA66(UL 94V-0)
Clamp: Phosphor Bronze,Nickel Plated.
Wire Cage: Brass,Nickel Plated.
Screw: M3,Steel,Zinc Plated.

设计 /Designed by	绘图 /Drawing by	审核 /Checked by	批准 /Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD				X ₁	X ₂
				.X	.X
				.XX	.XX
				.XXX	.XXX
图名 /Title XY2500FAV 产品图				文件编号 /File No. QJ/XYT-2275100	
备注 /Remark				页序 /Sheet	
				单位 /Units:	mm

序号 /RevNo.	更改记录 /Revision note	签名 /Signature	日期 /Date
------------	---------------------	---------------	----------