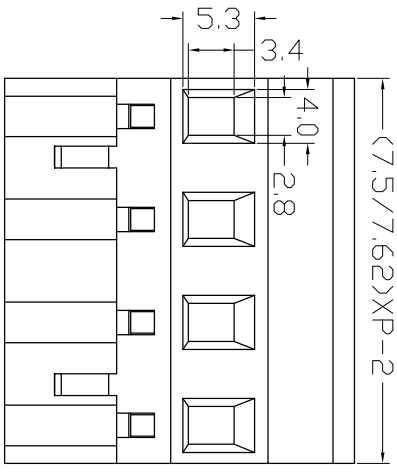
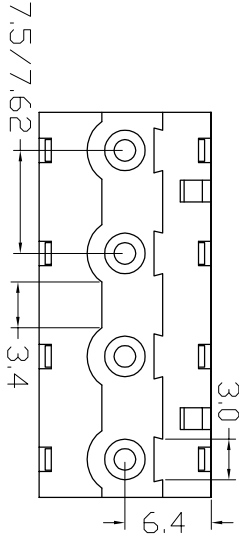
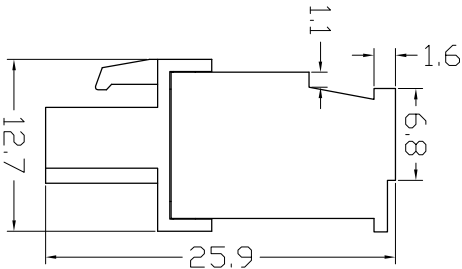




300V 15A 28-12AWG 2.5mm²

Poles: 2-12P

Pitch: 7.5mm(.295")/7.62mm(.300")

Materials

Housing: PA66(UL 94V-0)

Clamp: Phosphor Bronze,Nickel Plated.

Wire Cage: Brass(Nickel Plated)

Screw: M3,Steel(A3),Zinc Plated.

Torque: 0.5N.m

序号/Revmo.	更改记录/Revision note	签名 /signature	日期 /date
-----------	--------------------	---------------	----------

设计/Designed by	绘图/Drawing by	审核/checked by	批准/Approved by	未注公差 General Tolerance	
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名/Title	文件编号/File no.	X. ±0.2 .X ±0.1 .XX ±0.05 .XXX ±0.01	X. ±2° .X ±1° .XX ±0.5°
XY2 500F-PR XY2 500F-QR		页序/Sheet		单位/Units: mm	