
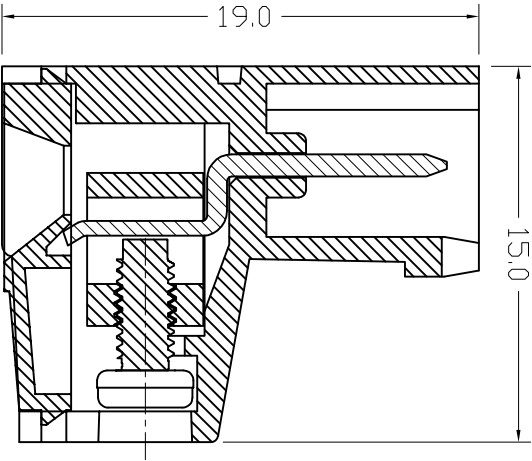
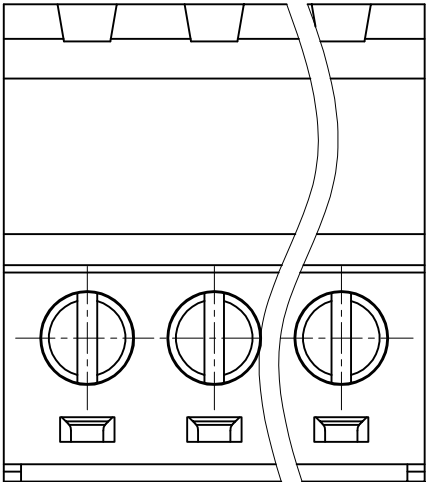


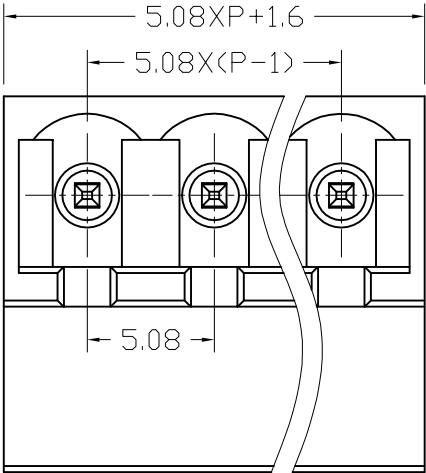

300V 15A 28-12AWG 2.5mm²

Poles: 2P-24P

Pitch: 5.08mm(.200")

Materials

Housing: PA66(UL 94V-0)

Contact: Brass, Nickel Plated.

Wire Cage: Brass, Nickel Plated.

Screw: M2.5, Steel A3, Zn Plated.

设计 /Designed by		绘图 /Drawing by		审核 /Checked by		批准 /Approved by		未注公差			
								General Tolerance			
 新莱亚电子科技 XINLAIWA ELECTRONIC CO.,LTD		图名 /Title		XY2500FR-5.08		文件编号 /File No.		X ₁		± Z ⁺	
								X	0.1	X ⁺	1 ⁺
								XX	0.05	XX ⁺	0.5 ⁺
								XXX	0.01		
备注 /Remark				页序 /Sheet		±		单位 /Units		mm	



XINLANYA ELECTRONIC CO.,LTD