
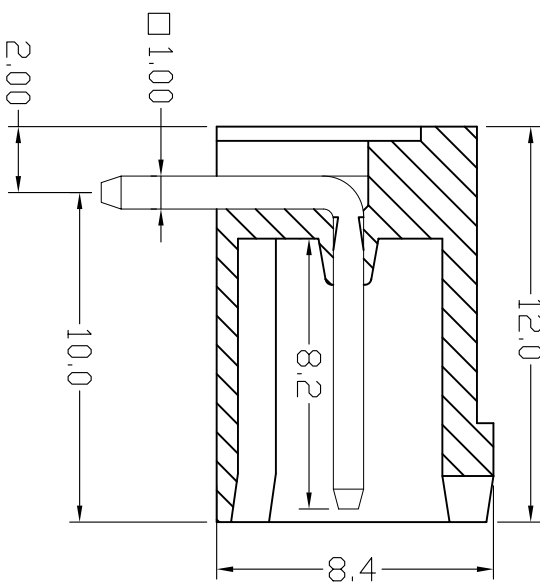


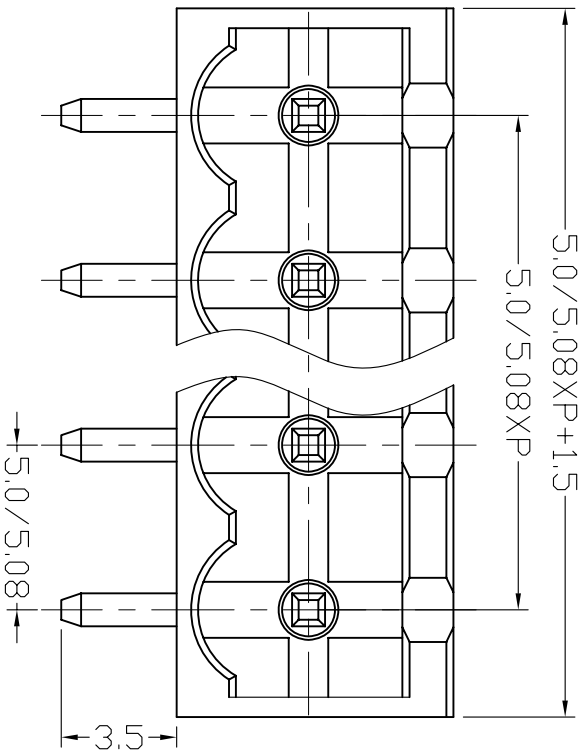

300V 15A

Poles: 2P-22P

Pitch: 5.0mm(.197")5.08mm(.200")


Materials

Housing: PA66(UL 94V-0)

Solder Pin: Brass, Tin Plated.

序号 /rev/No.	更改记录 /revision note	签名 /Signature	日期 /Date
-------------	---------------------	---------------	----------

设计 /Designed by	绘图 /Drawing by	审核 /Checked by	批准 /Approved by	未注公差 General Tolerance	
图名 /Title		文件编号 /File No.		X. ± 0.2	X'. ± 2°
XY2500R-B		00/XY1-2281300		X. ± 0.1	X'. ± 1°
XY2500R-D		00/XY1-2281400		.XX ± 0.05	.X' ± 0.5°
备注 /Remark	页序 /Sheet			.XXX ± 0.01	
单位 /Units:				mm	



XINLAIYA ELECTRONIC CO.,LTD