
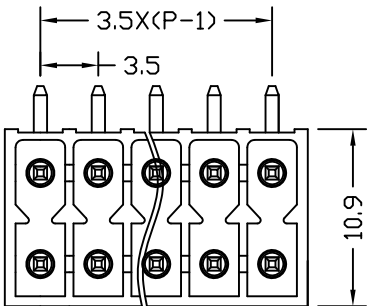


序号/Rev No	名称/Title	材料//Material	文件编号/File No
1	XY2500VHCS-3.5塑壳	PA66 (UL94V-0)	QJ/XYT-A202400
2	弯针1/2	铜（镀锡）	

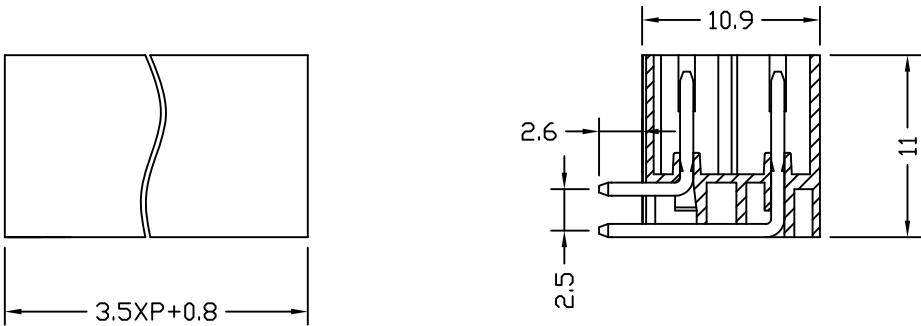

Note
Poles: P=2x(2P~20P)
Pitch: 3.5mm

Use and Performance
Wire range:28~16AWG, 1.5mm²
Strip length:9~10mm
Rated voltage:300V
Rated current:8A
Withstanding voltage:AC2500V/Min
Ambient temperature:-40℃~+105℃

未注公差/Undeclared tolerance															
Plastic parts Dimension(mm)	0 ~ 1	1 ~ 3	3 ~ 6	6 ~ 10	10 ~ 15	15 ~ 22	22 ~ 30	30 ~ 40	40 ~ 53	53 ~ 70	70 ~ 90	90 ~ 120	120 ~ 160	160 ~ 200	200 ~ 250
Solder needle length Dimension(mm)	±0.10 ~ 6	±0.11 ~ 10	±0.12 ~ 15	±0.14	±0.17	±0.20	±0.24	±0.28	±0.33	±0.40	±0.50	±0.60	±0.75	±0.95	±1.15
	±0.3	±0.35	±0.45												

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by
		图名/Title	文件编号/File No.
		XY2500RHC-3.5	QJ/XYT-A101800
		备注 /Remark	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date