
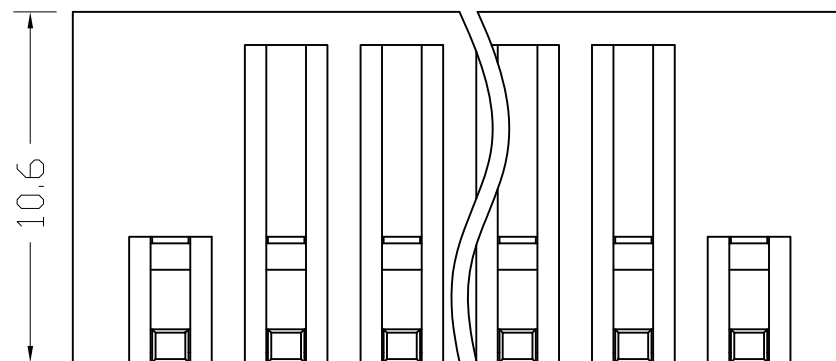
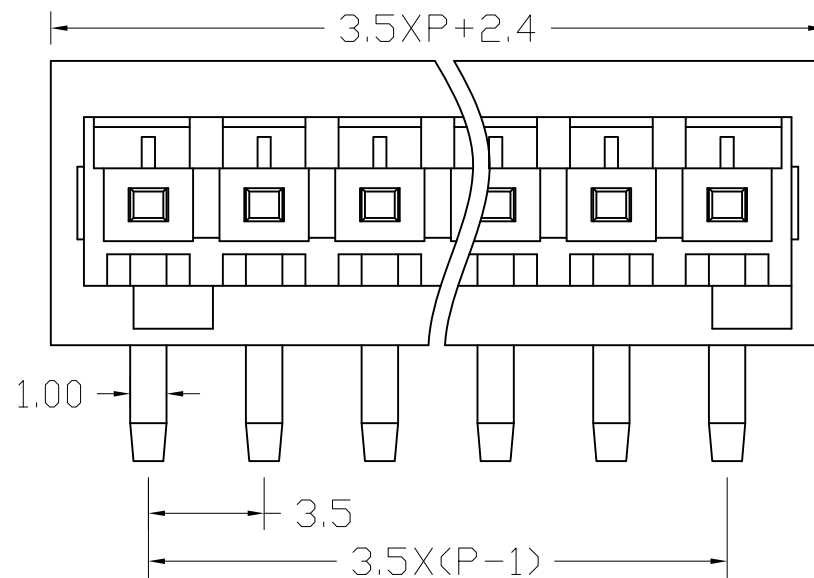


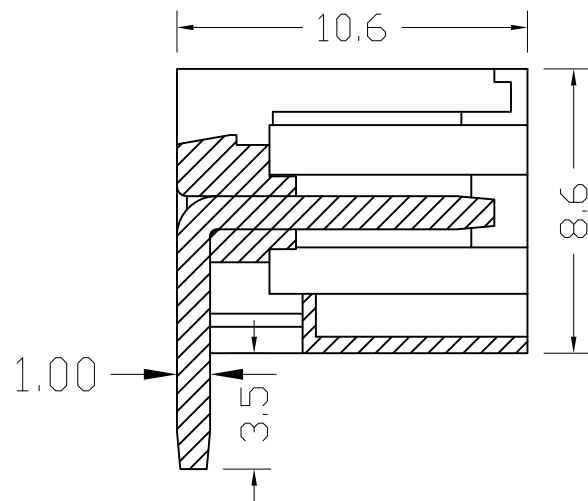

300 V 10 A
Piles: (2-24P)
Pitch: 3.5mm(.138")

Material

Housing: PA66(UL 94V-0)
Pin header: B rass ,Tin Plated

设计 /Designed by	绘图 /Drawing by	审核 /Checked by	批准 /Approved by	未注公差	
				General Tolerance	
新莱亚电子 XINLAIYA ELECTRONIC CO.,LTD		图名 /File name	文件编号 /File No.	X. ± 0.2	X.° ± 2°
		XY2505RC-3.5 产品图	QJ/XYT-22100200	.X ± 0.1	.X° ± 1°
			页序 /Sheet	.XX ± 0.05	.XX° ± 0.5°
				.XXX ± 0.01	
		备注 /Remark			单位 /Units:

X 新莱亚电子
XINLAIYA ELECTRONIC CO.,LTD

图名 /File name

XY2505RC- 3.5

产品图

备注 /Remark

文件编号 /File No.

QJ/XYT-22100200

页序 /Sheet

单位 /Units: mm

序号 /RevNo.	更改记录 /Revision note	签名 /Signature	日期 /Date
------------	---------------------	---------------	----------