
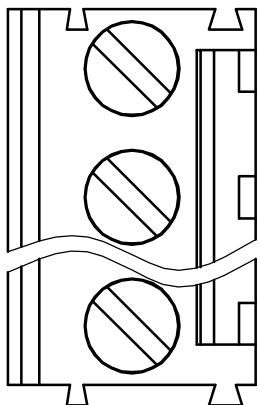


序号/RevNo.	名称/Title	文件编号/File No.
1	XY303一字螺丝 (与XY302一字螺丝共用)	QJ/XYT-2148101
2	XY303铜方块 (与XY302铜方块共用)	QJ/XYT-2148102
3	XY303V 端子 (与XY302端子共用)	QJ/XYT-2148104
4	XY303 塑件	QJ/XYT-2149101

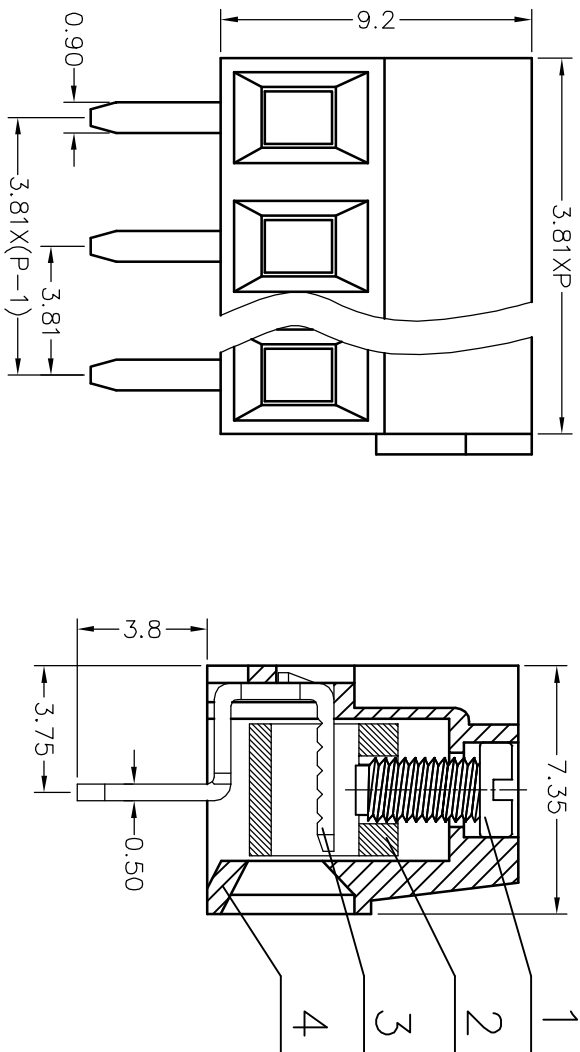

PCB LAY OUT

Electrical
UL 300V 10A 26-16AWG 1.0mm²
Withstand Voltage: 2000V/Min

Materials
Poles: (2P, 3P-24P)
Pitch: 3.81mm(.150")
Housing: PA66 (UL 94V-0)
Solder Pin: Brass, Tin Plated
Screw: M2, Steel (A3), Zinc Plated

Mechanical
Operating Temperature: -40°C ~ +105°C
Soldering temperature: 260±5/5sec
Torque: 0.2N.m or 1.7lbs-in. max
Strip Length: 4-5mm

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
图名/Title		文件编号/File No.		X ⁺ ±0.2	X ⁺ ±2°
XY303V-3.81		QJ/XYT-2249100		.X ±0.1	.X° ±1°
备注/Remark		页序/Sheet		.XX ±0.05	.XX° ±0.5°
XINLAIYA ELECTRONIC CO., LTD		单位/Unit:		mm	