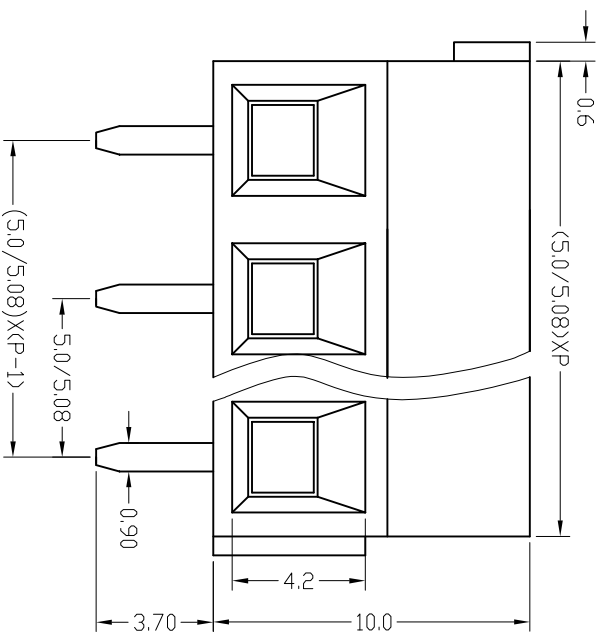


300V 12A 26-14AWG 1.5mm²

Poles: 2P&3P-24P

Pitch: 5.0mm (.197")/5.08mm (.200")

Materials

Housing: PA66 (UL 94V-0)

Solder Pin: Brass, Tin Plated

Wire Cage: Brass, Nickel Plated

Screw: M3.0, Steel (A3), Zinc Plated

Torque: 0.5N.m

序号/Revno.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

设计/Designed by		绘图/Drawing by		审核/Checked by		批准/Approved by		未注公差 General Tolerance	
 新莱亚电子 XINLAIVA ELECTRONIC CO., LTD		图名/Title		文件编号/File No.		X: ±0.2		X: ±2°	
		XY304V				.X ±0.1		.X° ±1°	
		页序/Sheet				.XX ±0.05		.XX° ±0.5°	
		备注/Remark				.XXX ±0.01			
						单位/Units: mm			