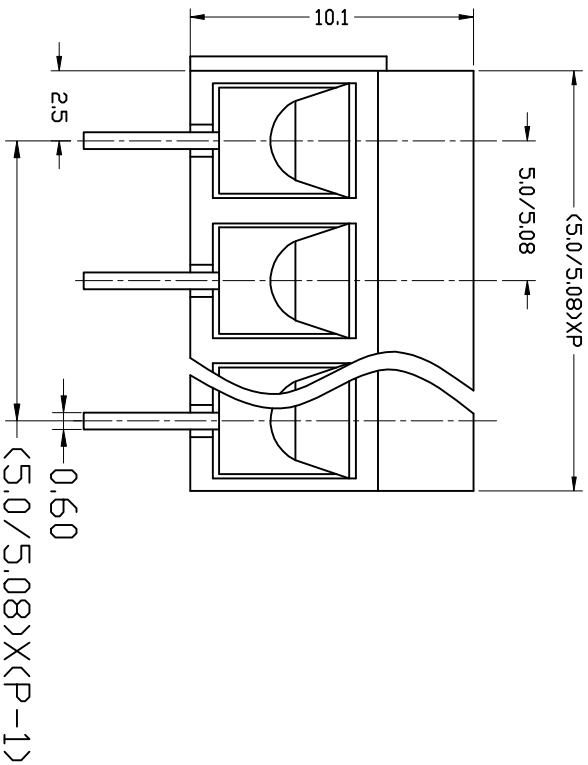


300V 10A 22-14AWG 1.5mm<sup>2</sup>  
Poles: 2P&3P-24P  
Pitch: 5.0mm (.197"), 5.08mm (.200")

**Materials**  
Housing: PBT (UL 94V-0)  
Wire Protector: Stainless steel  
Solder Pin: Brass, Tin Plated  
Screw: M2.5, Steel (A3), Zinc Plated  
Torque: 0.4N.m

|                |  |               |  |               |  |                |  |           |  |                                                                   |  |
|----------------|--|---------------|--|---------------|--|----------------|--|-----------|--|-------------------------------------------------------------------|--|
| 设计/designed by |  | 绘图/drawing by |  | 审核/checked by |  | 批准/approved by |  | 备注/remark |  | 本表公版<br>General reference                                         |  |
|                |  |               |  | 图名/title      |  | 文件编号/file no.  |  |           |  | X. 80.2 X. 82°<br>-X 80.1 X. 81°<br>-X 80.05 X. 80.5°<br>-X 80.01 |  |
|                |  |               |  |               |  | 页序/number      |  |           |  | 单位/unit: mm                                                       |  |