
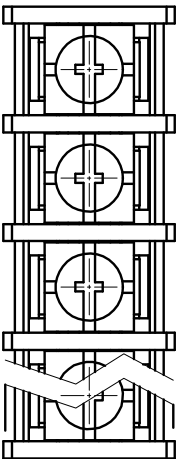
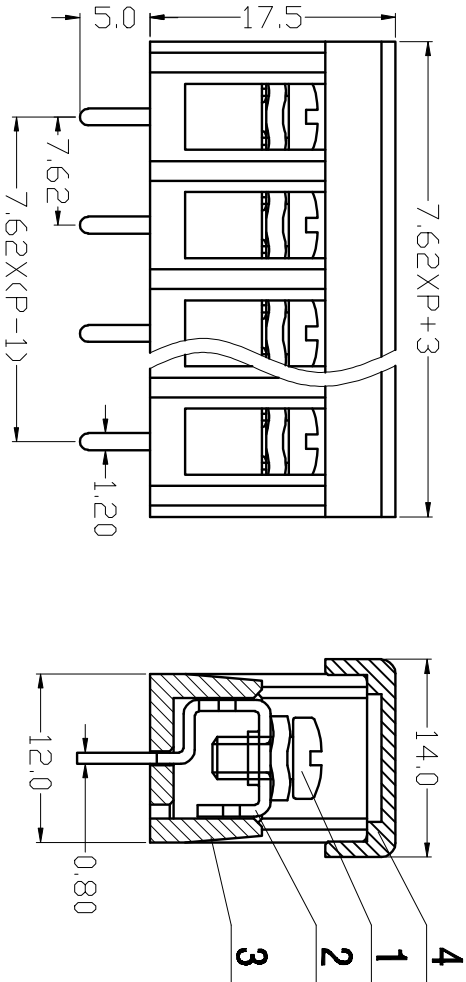


序号/revs.	数量/qty	文件编号/rev. no.
1	XY025 螺栓	QJXYT-2113S101
2	XY025A 端子	QJXYT-2113S102
3	XY025 塑料件	QJXYT-2113S103
4	XY025 垫	QJXYT-2113S104

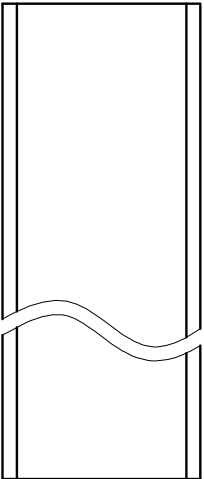

300V 15A 22-14AWG 2.5mm²
Poles: (2,3-24P)
Pitch: 7.62mm(.300")

Materials

Housing: PA66(UL 94V-0)
Solder Pin: Brass, Tin Plated
Screw: M3, Steel, Nickel Plated

Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					-	~	□
0	Over	6	10	24	30	60	100	150	0.1/10
T0	T0	T0	T0	T0	T0	T0	T0	T0	
6	10	24	30	60	100	150			<
±0.10	±0.15	±0.20	±0.25	±0.40	±0.50	±0.70	±1.0		±2°

序号/revs.	更改记录/revision	签名/Signature	日期/Date
----------	---------------	--------------	---------

设计/Designed by		绘图/Drawn by		审核/Reviewed by		批准/Approved by	
 新莱亚电子 XINLANYA ELECTRONIC CO.,LTD				图名/Title		文件编号/rev. no.	
				XY828AK 产品图		QJXYT-2213S100	
备注/Remark				版本/revision		单位/units	
				A0		mm	