
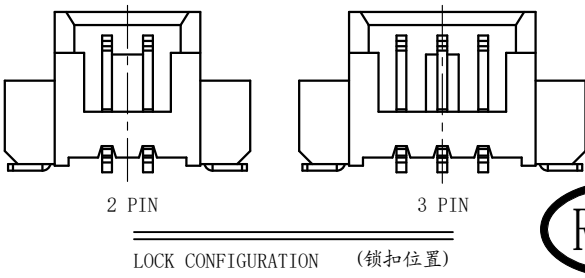
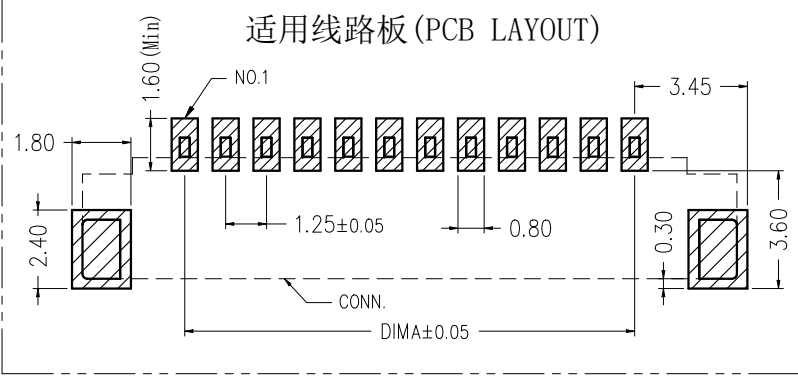
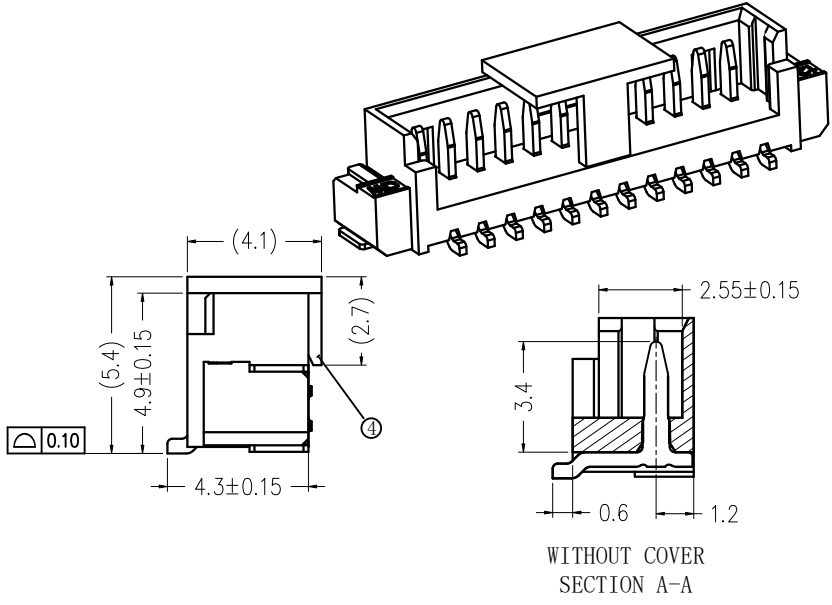


版次	变更摘要	日期
0	新产品发行	2015/1/28
1	设变胶芯壁与吸盖结构(Plastic Core And Cap Structure)	2016/5/23

序号	品名	材质
①	A型立式WTB胶芯 1.25 Pitch S/T Wire To Board Housing(H=4.9)	LCP UL94V-0 本色 Natural
②	A型立式WTB端子 1.25 Pitch S/T Wire To Board Terminal(H=4.9)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	A型立式WTB焊片 1.25 Pitch S/T Wire To Board Fitting Nail(H=4.9)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
④	A型立式WTB吸盖 1.25 Pitch S/T Wire To Board Cover(H=4.9)	LCP UL94V-0 本色 Natural

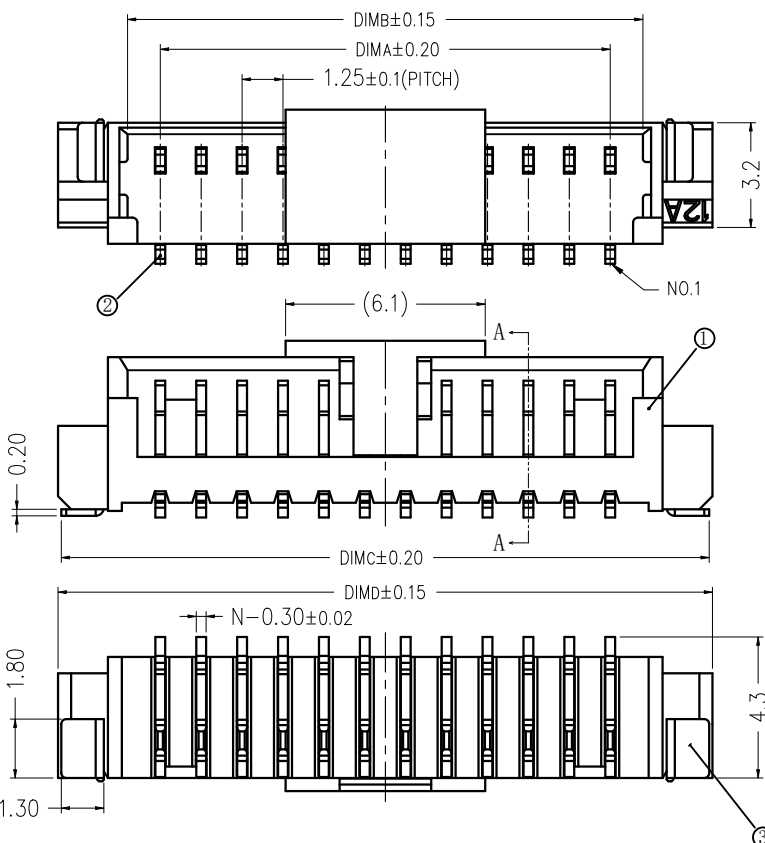

技术指标 (Technical Index):

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
- 锁扣窗口: 2~3PIN为1个, ≥4PIN为2个。(Lock Configuration: 2 to 3Pin is 1, ≥4Pin is 2)
- 不同Pin位吸盖加入/取出力有差异, 实属正常现象。(It is normal that there are differences between suction cap and suction cap at different Pin positions)
- 温度范围 (Temperature range): -25° C~85° C.
- 额定电压 (Rated voltage): 125V, AC/DC (=等效).
- 接触电阻 (Contact resistance): ≤0.02Ω.
- 绝缘电阻 (Insulation resistance): ≥100MΩ
- 产品料号 (Product material No.):

LO	胶芯尼龙料无LOGO:WD(Nylon material without LOGO:WD)
00	胶芯有LOGO:WD(Housing with LOGO:WD)
OW	胶芯无LOGO(Housing without LOGO)

WT125AL-*** **

NO OF CKT (产品PIN数)

Packing (包装方式)

- 0: 端子全雾锡 (Terminal all mist tin) T: TUBE管装
1: 端子全金 (Terminal G/F OVER ALL) R: TAPE & REEL卷装
4: 端子全亮锡 (Terminal all bright tin) C: TAPE & REEL WITH COVER (加吸盖卷装)

CKT	DIM A	DIM B	DIM C	DIM D
2	1.25	3.25	7.30	7.50
3	2.50	4.50	8.55	8.75
4	3.75	5.75	9.80	10.00
5	5.00	7.00	11.05	11.25
6	6.25	8.25	12.30	12.50
7	7.50	9.50	13.55	13.75
8	8.75	10.75	14.80	15.00
9	10.00	12.00	16.05	16.25
10	11.25	13.25	17.30	17.50
11	12.50	14.50	18.55	18.75
12	13.75	15.75	19.80	20.00
13	15.00	17.00	21.05	21.25
14	16.25	18.25	22.30	22.50
15	17.50	19.50	23.55	23.75
16	18.75	20.75	24.80	25.00
17	20.00	22.00	26.05	26.25
18	21.25	23.25	27.30	27.50
19	22.50	24.50	28.55	28.75
20	23.75	25.75	29.80	30.00

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO., LTD

品名 (TITLE)	1.25 Pitch A型立式WTB 1.25 PITCH H4.9 S/T WIRE TO BOARD SMT CONN.	制图 (DR)	ANLAN
料号 (DWG.NO)	WT125AL-*****	校对 (CHKD)	李绍宗
比例 (SCALE)	单位 (UNITS) mm	审核 (APPD)	黄志明
		张数 (SHEET) 1 OF 1	SIZE A4
			REV A

一般公差 (TOLERANCE)			
X. ±.50	.XX ±.10		
.X ±.20	.XXX ±.05		
ANGLES	±1°		

